

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section

Township _____ North, Range _____ East of _____ Principal Meridian.

N. B. - The variation of needle adopted in establishing corners is _____

aid, do

section

vey:

ains to 0

actions of

reeyor.


Government Corners.		Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
No.									
1.	N. W. Sec. cor. Identified								
2.	N. E. Sec. cor. Identified								
3.	S. E. Sec. cor. Identified								
4.	S. W. Sec. cor. Identified								
5.	N. 1/4 Sec. cor. Identified								
6.	E. 1/4 Sec. cor. Identified								
7.	S. 1/4 Sec. cor. Identified								
8.	W. 1/4 Sec. cor. Identified								
Subdivision Corners.									
1.	Center 1/4 Sec. cor.								
2.	North 1/4-1/4s N. W. qr.								
3.	East 1/4-1/4s N. W. qr.								
4.	South 1/4-1/4s N. W. qr.								
5.	West 1/4-1/4s N. W. qr.								
6.	Center 1/4-1/4s N. W. qr.								
7.	North 1/4-1/4s N. E. qr.								
8.	East 1/4-1/4s N. E. qr.								
9.	South 1/4-1/4s N. E. qr.								
10.	Center 1/4-1/4s N. E. qr.								
11.	East 1/4-1/4s S. E. qr.								
12.	South 1/4-1/4s S. E. qr.								
13.	West 1/4-1/4s S. E. qr.								
14.	Center 1/4-1/4s S. E. qr.								
15.	South 1/4-1/4s S. W. qr.								
16.	West 1/4-1/4s S. W. qr.								
17.	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.	FLAGMEN.	AXMEN.

MINUTES.

Highway surveyed May 20 1905 in Quincy Sec 1 or lot 1-16-4
 commenced at S.E. corner of lot 4 on Se line thence N. 3 chains to a stone
 in curb of Harrison Street in Village of Quincy thence South 7.08 2 chains 88 links
 to a stone thence South 22.8 2 chains 20 links to an iron wheel-
 thence S-32 E- to curb of Highway 7.25 to curb of old Quincy and White
 Creek road.

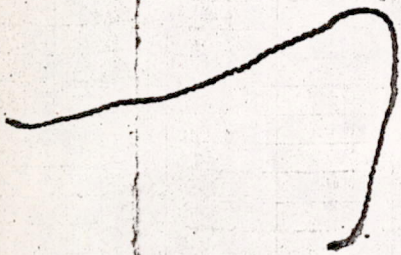


MIS13160400001

CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, }
ADAMS COUNTY. }

I, _____ Surveyor, in and for the County and State aforesaid, do hereby certify that I have surveyed and subdivided Section _____ Township _____ North of Range _____ East of _____ Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:
Established the center of the section at the point of intersection of straight quarter lines.
Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

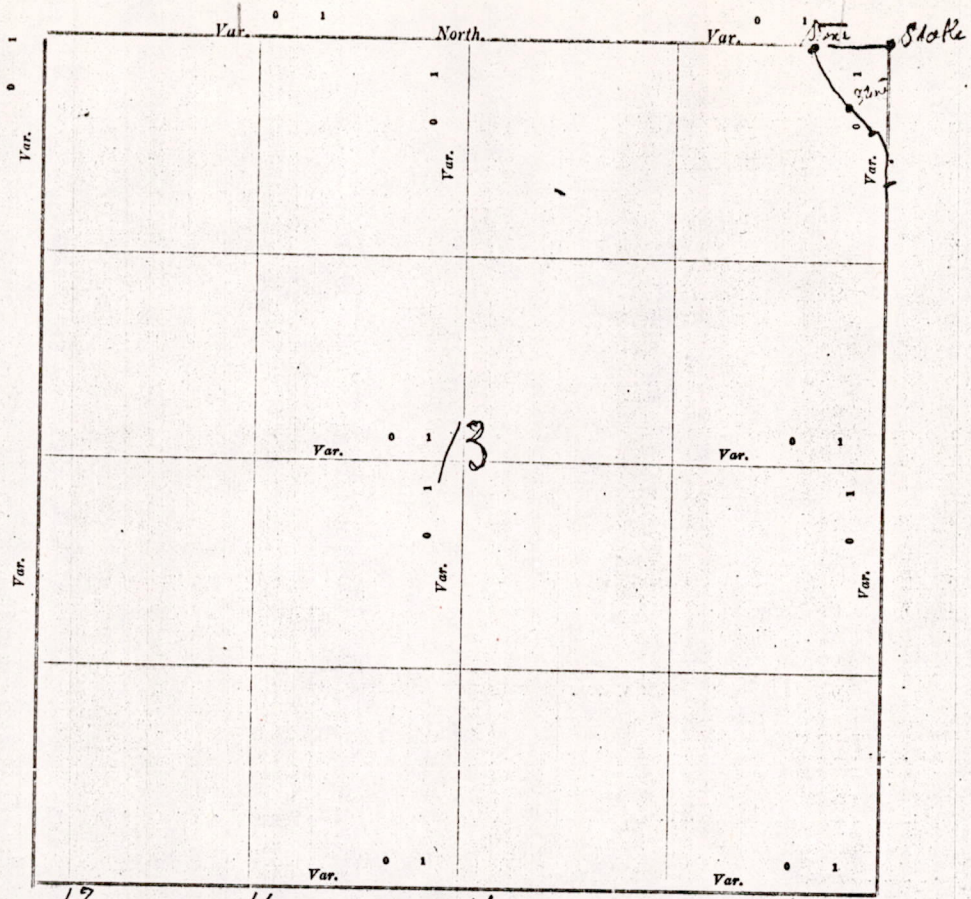

Plat of Section 13, Township 16- North, Range 4 East of _____ Principal Meridian. Scale, 80 chains to 0 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided _____ A. D. 19 _____, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this _____ day of _____ A. D. 19 _____

Surveyor.

DESCRIPTION

Township

N. B. - The variation

No.	
1	N. W. 1/4
2	S. E. 1/4
3	S. E. 1/4
4	S. W. 1/4
5	N. 1/4
6	E. 1/4
7	S. 1/4
8	W. 1/4

No. SUBDIVISION

1	Center 1/4
2	North 1/4
3	East 1/4
4	South 1/4
5	West 1/4
6	Center 1/4
7	North 1/4
8	East 1/4
9	South 1/4
10	Center 1/4
11	East 1/4
12	South 1/4
13	West 1/4
14	Center 1/4
15	South 1/4
16	West 1/4
17	Center 1/4

Highway sur
commencing at
mi center of
to a
thence S-32 E-16
Creek road.

MIS 13160400001