


CERTIFICATE OF SURVEY.

. DESCRIPTION.

STATE OF WISCONSIN, } ss. W. L. Smith Surveyor, in and for the County and State aforesaid, do
 ADAMS COUNTY. hereby certify that I have surveyed and subdivided Section 5 Township 16 North of Range 5 East of
 Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:
 Established the center of the section at the point of intersection of straight quarter lines
 Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section
 corners, according to the original field-notes of the Government survey.
 Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

Township
 N. H. The variation of the
 Government

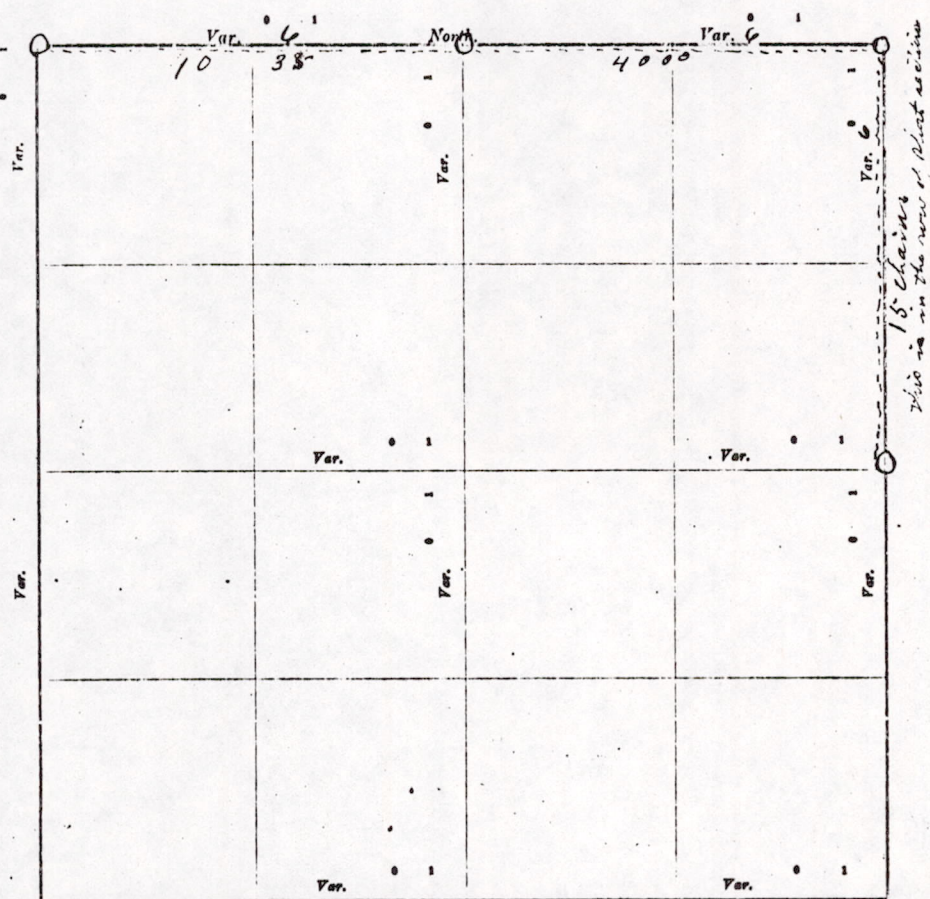

No.	DESCRIPTION
1	N. W. Sec. cor. Ind.
2	N. E. Sec. cor. Ind.
3	S. E. Sec. cor. Ind.
4	S. W. Sec. cor. Ind.
5	N. 1/4 Sec. cor. Ind.
6	E. 1/4 Sec. cor. Ind.
7	S. 1/4 Sec. cor. Ind.
8	W. 1/4 Sec. cor. Ind.
No. SUBDIVISION COR.	
1	Center 1/4 Sec. cor.
2	North 1/4-1/4 S. W.
3	East 1/4-1/4 S. W.
4	South 1/4-1/4 S. W.
5	West 1/4-1/4 S. W.
6	Center 1/4-1/4 S. E.
7	North 1/4-1/4 S. E.
8	East 1/4-1/4 S. E.
9	South 1/4-1/4 S. E.
10	Center 1/4-1/4 S. W.
11	East 1/4-1/4 S. E.
12	South 1/4-1/4 S. E.
13	West 1/4-1/4 S. E.
14	Center 1/4-1/4 S. E.
15	South 1/4-1/4 S. W.
16	West 1/4-1/4 S. W.
17	Center 1/4-1/4 S. W.

Plat of Section 5 Township 16 North, Range 5 East of 4th Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.
 Declination of the Magnetic Meridian from the True Meridian 6 East.
 Surveyed and subdivided March 18th A. D. 1007, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.
 WITNESS my hand this 18th day of March A. D. 1007.
W. L. Smith County Surveyor.

*Geo Lister
 who Lister*

*Beginning at
 Town 16-12-5-E
 Quarter Post on
 Bearing & on
 line to the North
 Post. The west
 which is the return
 distance East to
 new Bearing.*

The above lines were run for Mr James Spence

MIS05160500001

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section

Township _____ North; Range _____ East of _____ Principal Meridian.

N. B. - The variation of needle adopted in establishing corners is _____

No.	Government Corners.	Bearing Trees.	In. dia.	Course they bear.	Links Distant.	Bearing Trees.	In. dia.	Course they bear.	Links Distant.
1	N. W. Sec. cor. Identified	State Stone in Highway							
2	N. E. Sec. cor. Identified	new Blk Pine	10	V. 64 W	32				
3	S. E. Sec. cor. Identified	new Blk oak	13	S-39-W	87				
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified	new Blk Pine	8	S-2-W	8 1/2				
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified								
No. SUBDIVISION CORNERS.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAIRMEN.	FLAGMEN.	AXMEN.
Geo. Litter John Litter	James Spence	

MINUTES.

Beginning at a stone at the North west corner of section 5-
Town 16-R 6-E, and running East 40 chains & 35 link to the
Quarter Post on North side of said section, old corner found by old
Bearings & or: new Bearing made, then East at 6-D-V. same as other
line to the North East corner of said section, could find no Bearing or
Post. Then went to South East corner of section 5; and Ran North 15 chains
which is the returned Government distance, and established corner
distance East from Quarter Post to North East corner 40 chains, made one
new Bearing.

W. L. Smith County Surveyor

MISO.5160500001