


Government Land Corner Certificate

CENTER OF SECTION

ADAMS County  
 TYPE OF MONUMENT: 2" IRON PIPE  
 STATE PLANE COORDINATES: N \_\_\_\_\_  
 E \_\_\_\_\_  
 ELEVATION — M.S.L. DATUM: \_\_\_\_\_  
 THETA ANGLE: \_\_\_\_\_  
 FIELD BOOK: 7701 PAGE 18  
 DRAWN BY: D. DONNELLY

CORNER NO. \_\_\_\_\_  
 SECTION 24  
 TOWN 16  
 RANGE 5




LOCATION  
(Indicated by 'X')

BASIS FOR MONUMENT LOCATION

Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary)

Researched County survey records. Found survey made by Z. Wise, Oct. 27, 1874, recorded in Vol. 2, Pg. 109. Set  $C\frac{1}{4}$  cor. by single proportionate measure half the distance and on line between  $N\frac{1}{4}$  cor. and  $S\frac{1}{4}$  cor. which correlates with above survey notes and best fits occupation in area. Found no evidence of bearing trees or monumentation at corner. Corner computed by E.D.M. traverse.

SEAL:

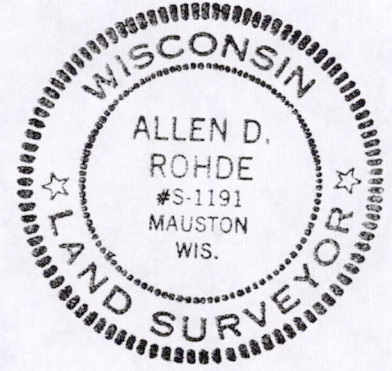

Note:

Proportion derived from measurement on north line of the  $NW\frac{1}{4}$  of section 24 and above survey notes.

DATA SHOWN HERE ON CERTIFIED CORRECT:


*Allen D. Rohde*  
 Registered Land Surveyor

DATE: 12-12-77

TIE SKETCH

Show at least four ties, also fence lines, roads, topo, size and type of witness trees' and if off road - best way to arrive at corner.

NOTE : MEASURED TO P.K. NAIL & SHINER IN BEARING TREES WITH BLAZES

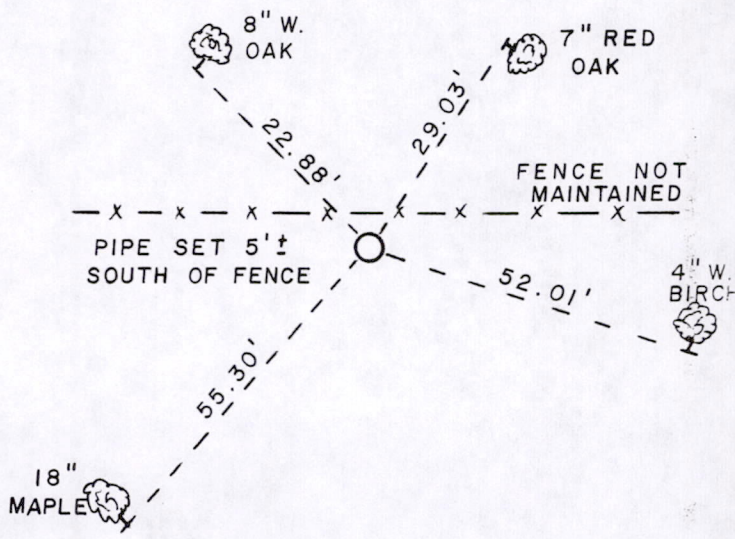

MAINTENANCE RECORD

Date	Init.	Remarks

MIS24160500001