


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, }
ADAMS COUNTY. }

vs. Hugh C. Henley Surveyor, in and for the County and State aforesaid, do

herby certify that I have surveyed and subdivided Section 21 Township 16 North of Range 7 East of 4 Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

Established the center of the section at the point of intersection of straight quarter lines.
Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

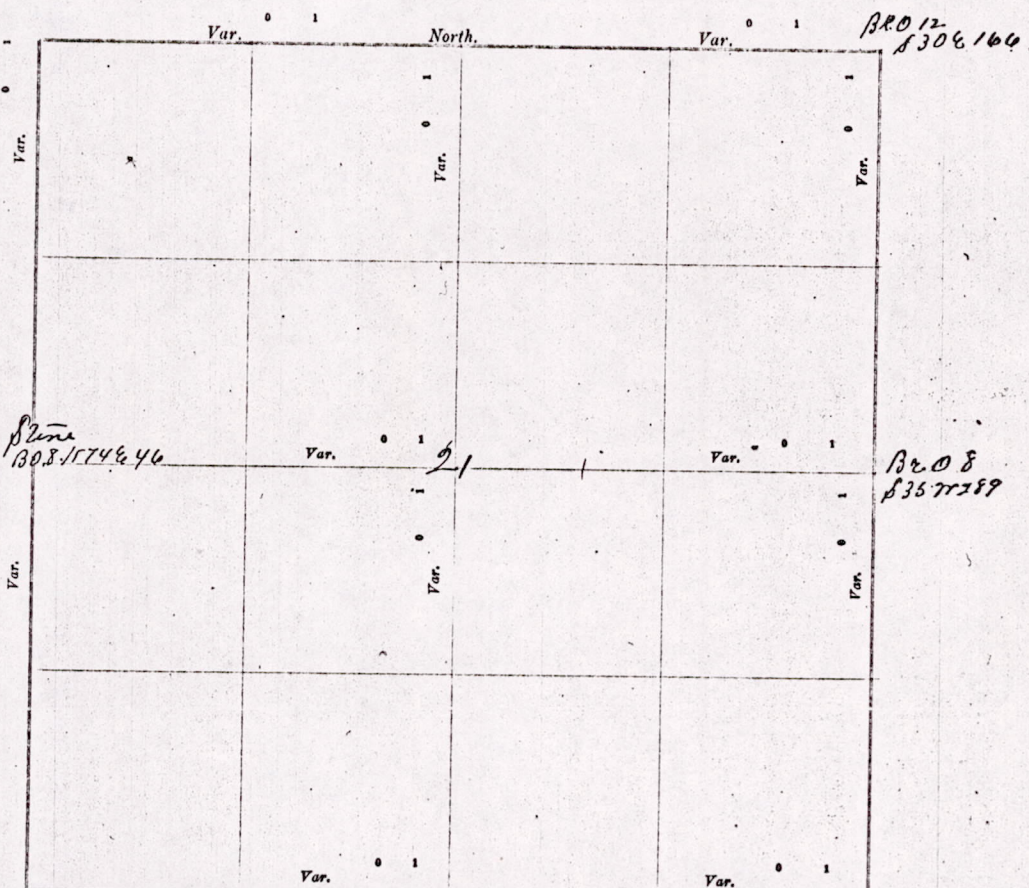

Plat of Section 21, Township 16 North, Range 7 East of 4 Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.
Surveyed and subdivided March 31 A. D. 1903, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.
WITNESS my hand this 31 day of March A. D. 1903.

Hugh C. Henley Surveyor.

MIS 21160700001

DESCRIP
Township
N. B. The

No.	
1	N. W. Sec.
2	N. E. Sec.
3	S. E. Sec.
4	S. W. Sec.
5	N. 1/4 Sec.
6	E. 1/4 Sec.
7	S. 1/4 Sec.
8	W. 1/4 Sec.
No.	SUBDIVISION
1	Center 1/4 Sec.
2	North 1/4-1/4
3	East 1/4-1/4
4	South 1/4-1/4
5	West 1/4-1/4
6	Center 1/4-1/4
7	North 1/4-1/4
8	East 1/4-1/4
9	South 1/4-1/4
10	Center 1/4-1/4
11	East 1/4-1/4
12	South 1/4-1/4
13	West 1/4-1/4
14	Center 1/4-1/4
15	South 1/4-1/4
16	West 1/4-1/4
17	Center 1/4-1/4

CHAIN

1/4 Post-between divided distance
1/4 between 21 and bearing Br 0
S.W. corner of
no no One

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section
Township 16 North, Range 7 East of 4 Principal Meridian.

N. B.—The variation of needle adopted in establishing corners is _____

ate aforesaid, do
ast of 4

quarter section
ment survey:

0 12
3306160

2.08
357289

chains to 6

structions of

Surveyor.

Government Corners.		Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
No.									
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified	Br. O	8	S 35 77	289				
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified	Stone Br. O	8	N 74 46	46				
NO. SUBDIVISION CORNERS.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

Names of Sworn Assistants.

CHAINMEN.	FLAGMEN.	AXMEN.

MINUTES.

1/4 Post between 21 and 20 I could find no bearings put in stone and divided distance between ^{same} corners made new bearing tree B.R.O 8 N. 74 & 46

1/4 between 21 and 22 could find no bearings and put in new bearing Br Oak 8 S 35 77 289

S.W. corner of section found no trace of government trees and put in new bearing corner is now marked on stone pile

MUS 211 60700001