


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, } ss. M. L. Smith County Surveyor, in and for the County and State of Wisconsin
ADAMS COUNTY.

hereby certify that I have surveyed ~~and subdivided~~ Section 10-11 Township 17, North of Range 5 East of 4th Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

- Established the center of the section at the point of intersection of straight quarter lines.
- Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
- Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey.

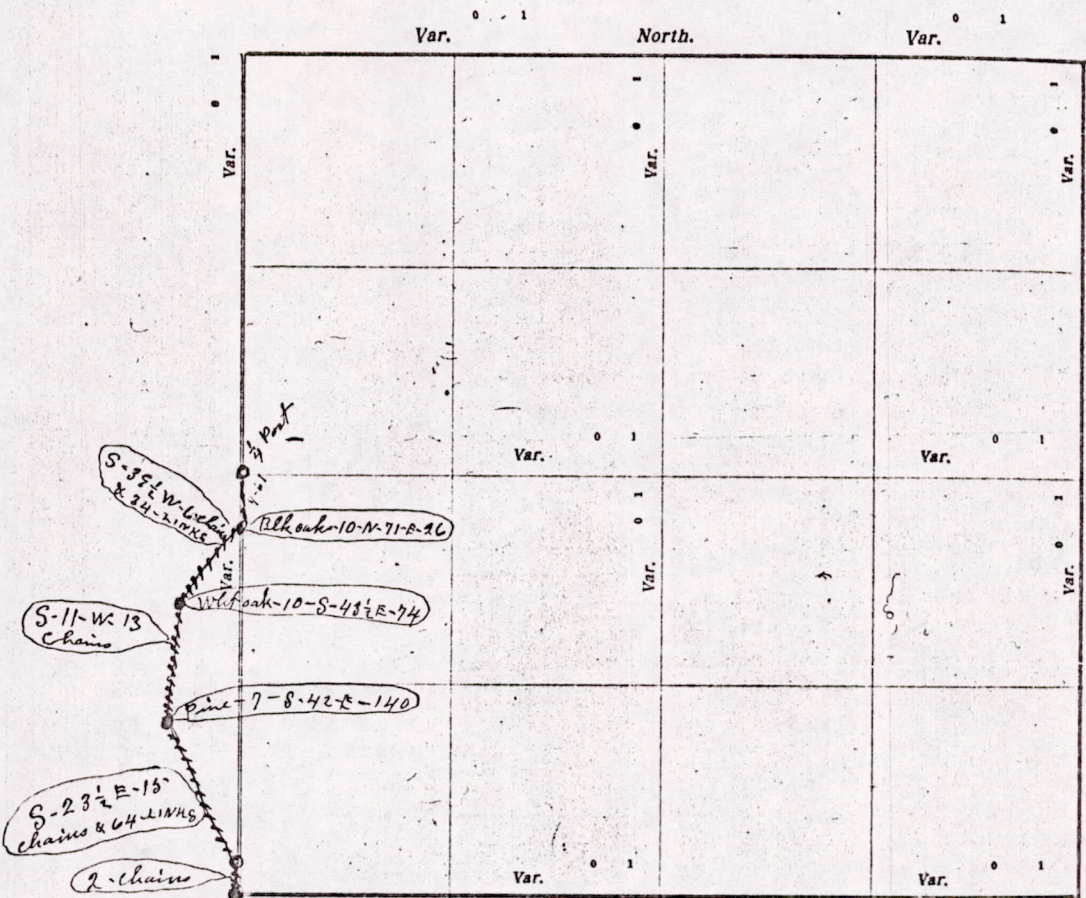

Plat of Section 10-11, Township 17 North, Range 5 East of 4th Principal Meridian. Scale, 80 chains to an inch. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.
 Surveyed ~~and subdivided~~ October 15 A. D. 1919, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.
 WITNESS my hand this 15th day of October A. D. 1919.

M. L. Smith County Surveyor.

The above work was done at the request of the Town Board of the Town of Adams.

MIS 1176500001

DESCRIPTION of Section, Quarter Section and Quarter-quarter Section Corners of Section
 Township _____ North, Range _____ East of _____ Principal Meridian.

N.B. The variation of needle adopted in establishing corners is _____

Government Corners		Bearing Trees	In. dia.	Courses they bear	Links Distant	Bearing Trees	In. dia.	Courses they bear	Links Distant
No.									
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. $\frac{1}{4}$ Sec. cor. Identified								
6	E. $\frac{1}{4}$ Sec. cor. Identified								
7	S. $\frac{1}{4}$ Sec. cor. Identified								
8	W. $\frac{1}{4}$ Sec. cor. Identified								
SUBDIVISION CORNERS.									
1	Center $\frac{1}{4}$ Sec. cor.								
2	North $\frac{1}{4}$ - $\frac{1}{4}$ N. W. qr.								
3	East $\frac{1}{4}$ - $\frac{1}{4}$ N. W. qr.								
4	South $\frac{1}{4}$ - $\frac{1}{4}$ N. W. qr.								
5	West $\frac{1}{4}$ - $\frac{1}{4}$ N. W. qr.								
6	Center $\frac{1}{4}$ - $\frac{1}{4}$ N. W. qr.								
7	North $\frac{1}{4}$ - $\frac{1}{4}$ N. E. qr.								
8	East $\frac{1}{4}$ - $\frac{1}{4}$ N. E. qr.								
9	South $\frac{1}{4}$ - $\frac{1}{4}$ N. E. qr.								
10	Center $\frac{1}{4}$ - $\frac{1}{4}$ N. E. qr.								
11	East $\frac{1}{4}$ - $\frac{1}{4}$ S. E. qr.								
12	South $\frac{1}{4}$ - $\frac{1}{4}$ S. E. qr.								
13	West $\frac{1}{4}$ - $\frac{1}{4}$ S. E. qr.								
14	Center $\frac{1}{4}$ - $\frac{1}{4}$ S. E. qr.								
15	South $\frac{1}{4}$ - $\frac{1}{4}$ S. W. qr.								
16	West $\frac{1}{4}$ - $\frac{1}{4}$ S. W. qr.								
17	Center $\frac{1}{4}$ - $\frac{1}{4}$ S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN	FLAGMEN	AXMEN
Fred Quinell Boyd Quinell		

MINUTES.

Commencing 7 chains & 61 links south of the quarter Post between sections 11-12 - Town 17-R-5-E. at a Post in center of Highway. Thence S. 39 $\frac{1}{2}$ Degree W. 6 chains & 34 links to Post. Thence S. 11 Degree West. 13 chains to Post. Thence South 23 $\frac{1}{2}$ Degree East. 15 chains & 64 links to Post. Thence south on the section line 2 chains to section corner. The notes to the Bearing trees at each angle are given on the Plat.

The above was to locate the Highway around Duck Pond

M. L. Smith County Surveyor

MIS1170500001