


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, } ss. Adams County

Surveyor, in and for the County and State aforesaid, do hereby certify that I have surveyed and subdivided Section 6 Township 17 North of Range 6 East of 4th Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

- Established the center of the section at the point of intersection of straight quarter lines.
- Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
- Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey.

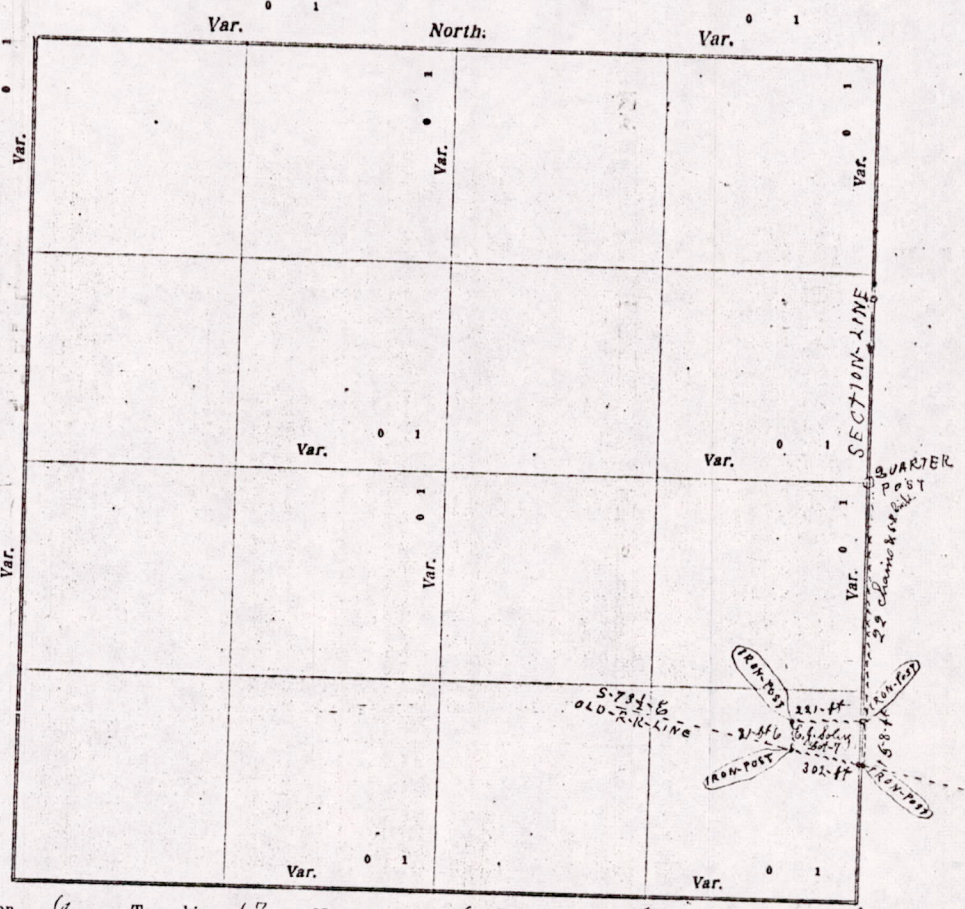

Plat of Section 6, Township 17 North, Range 6 East of 4th Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided the 20th day of April A. D. 1915, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 20th day of April A. D. 1915.

W. L. Smith & County Surveyor.

The above work was done at the request of Edwin J. Foley


M1806170600014

DESCRIPTION of Section, Quarter Section and Quarter-quarter Section Corners of Section 8

Township _____ North, Range _____ East of _____ Principal Meridian.

N. B.—The variation of needle adopted in establishing corners is _____

County and State aforesaid, do
East of _____
Section and quarter section
the Government survey:

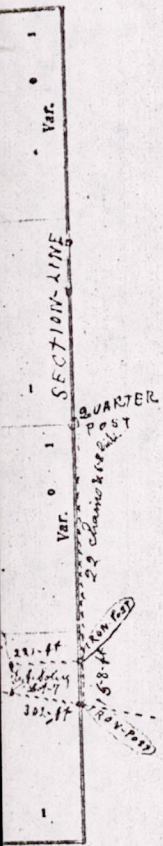

No.	Government Corners	Bearing Trees	In. dia.	Courses they bear	Links Distant	Bearing Trees	In. dia.	Courses they bear	Links Distant
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified								
No. SUBDIVISION CORNERS.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN

FLAGMEN

AXMEN

M. L. Smith
C. J. Foley

MINUTES.

commencing at the Identified 1/4 Post on the East side of section 6-5-17 R 16 E and thence south on the section line 22 chains & 58 links to place of beginning at the N. E. corner of Lot 7 in oak Grove addition of the Village of Friendship thence west 221 feet to iron Post, thence south 81 feet 6 inches to iron Post thence south 73 1/2 Degree East along the old Rail Road line, 302 feet to iron Post thence north 15-8 feet to iron Post at place of beginning.

ridian. Scale, 80 chains to 6
State Laws and Instructions of
Surveyor's office.
Surveyor.
C. J. Foley

M1506170600014