

CERTIFICATE OF SURVEY.


STATE OF WISCONSIN, } ss. J. M. Smith Surveyor, in and for the County and State aforesaid, do
ADAMS COUNTY, }

herely certify that I have surveyed and subdivided Section 17 Township 17 North of Range 6 East of 4th Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

Established the center of the section at the point of intersection of straight quarter lines.

Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.

Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

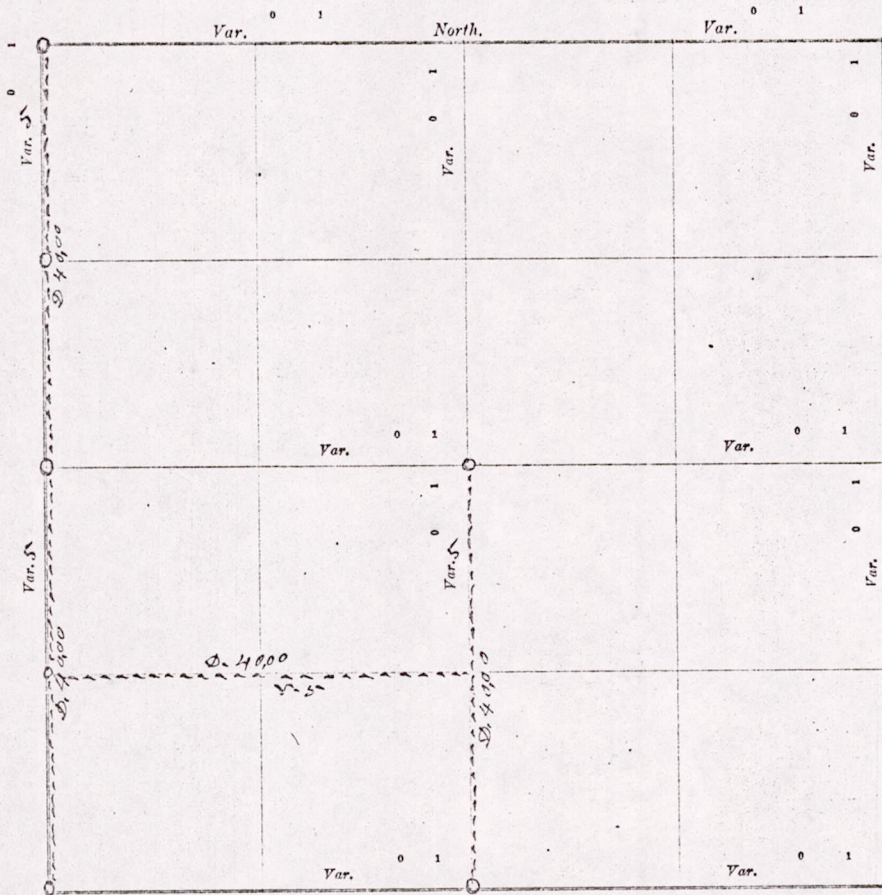

Plat of Section 17, Township 17 North, Range 6 East of 4th Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided May 8th A. D. 1912, in accordance with the State Laws and Instructions of

the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 8th day of May A. D. 1912.

J. M. Smith County Surveyor.

The above work was done at the request of Mr. Bedar and Henry Mason

MIS17170600001

Henry Frank

*starting at 5-20-12
good quarter
but could
on used
quarter
then 20*

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section

Township _____ North, Range _____ East of _____ Principal Meridian:

N. B. - The variation of needle adopted in establishing corners is _____

State aforesaid, do East of 17. 66

nd quarter section ernment survey:

No.	Government Corners.	Bearing Trees.	In. dia.	Course they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified								
Subdivision Corners.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.	FLAGMEN.	AXMEN.
Henry Mason Frank Bedar		

Scale, 80 chains to 8

ws and Instructions of s office.

city Surveyor.

Bedar and

MINUTES.

Starting at the Identified ^{North west} corner of section 17-7-17-R-6-E and run south at 5-D-V 40 chains, was satisfied that I found remains of old Post and set good quarter Post. Then ran north 40 chains more to S.W. corner of the section but could find nothing of either Bearings or Post. Then started at the 70 Rod Post on west side of section & ran east at 5-D-V 40 chains. Then went to the Identified quarter Post on south side of section & ran North at 5-D-V 20 chains & set Post then 20 chains more & set Post at center of section.

W. E. Smith County Surveyor

M 1517170600001