


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, }
 ADAMS COUNTY, } ss. M. L. Smith Surveyor, in and for the County and State aforesaid, do hereby certify that I have surveyed and subdivided Section 24 Township 18 North of Range 4 East of 4th Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:
 Established the center of the section at the point of intersection of straight quarter lines.
 Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
 Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

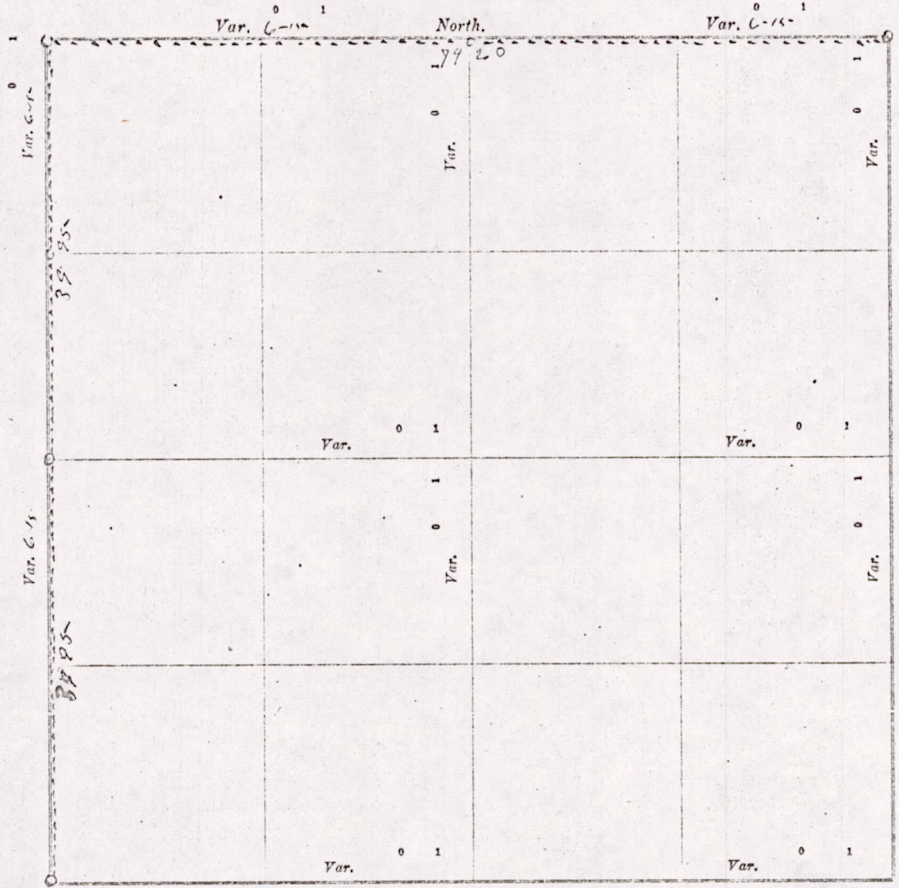

Plat of Section 24, Township 18 North, Range 4 East of 4th Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided this 31 day of May A. D. 1911, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 31 day of May A. D. 1911.

M. L. Smith County Surveyor.

The above work was done at the request of the Town Board of the Town of Strong's Prairie.

Otto Nilsen

State at 6- no rec the M East a Dial a Hig

M1524180400001

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section

Township _____ North, Range _____ East of _____ Principal Meridian.

N. B. - The variation of needle adopted in establishing corners is _____

No.	Government Corners.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
1	N. W. Sec. cor. Identified	<i>new</i>		<i>Blk Pine</i>	<i>14 S. 78-W</i>				<i>147 1/2</i>
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified								
NO. SUBDIVISION CORNERS.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.	FLAGMEN.	AXMEN.
<i>Otto Anderson</i> <i>Rele Waller</i>		

MINUTES.

Started at the southwest corner of section 24-7-18-R-4-C and ran north at 6-15-D-V. to the quarter Post on west side of section found *Lathe* bearing but no record, Distance 39 chains & 95 links, ran on North 38 chains & 95 links to the Northwest corner of said section set Post & made one new bearing, then ran East on section line on North side of section, to the North east corner Identified Distance 79 chains & 20 links. The work was done for the purpose of building a Highway on west side of section 24, and by side of the Town Road

M. L. Smith county surveyor

M1524180400001