

CERTIFICATE OF SURVEY.

STATE OF WISCONSIN,
ADAMS COUNTY.

ss. Hugh C Hurley


Surveyor, in and for the County and State aforesaid, do

hereby certify that I have surveyed and subdivided Section 33 Township 18 North of Range 4 East of Y Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

Established the center of the section at the point of intersection of straight quarter lines.

Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.

Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

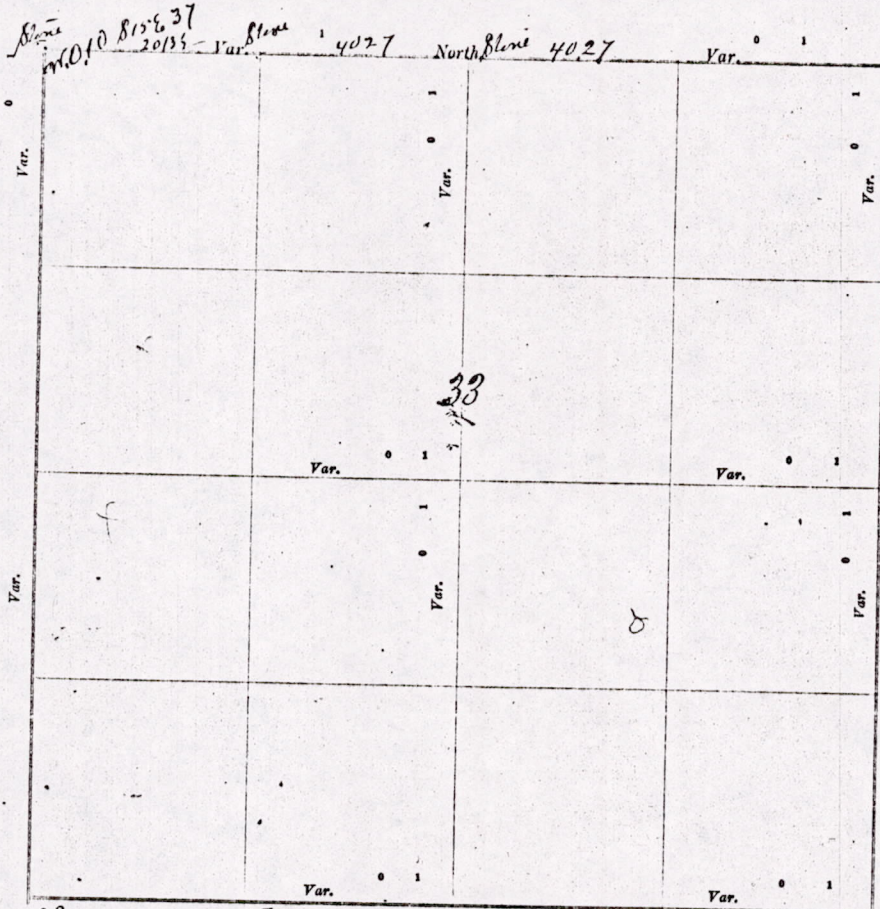

Plat of Section 33, Township 18 North, Range 4 East of Y Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided _____ A. D. 19 _____, in accordance with the State Laws and Instructions of

the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 22 day of June A. D. 1903.

Hugh C Hurley Surveyor.

John B...

*Put in
I measured
that was
quarter
then I
then I
and m*

MIS33180600001

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section **33**
 Township _____ North, Range _____ East of _____ Principal Meridian.

40
on

N. B.—The variation of needle adopted in establishing corners is _____

Government Corners.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
No. 1 N. W. Sec. cor. Identified	White Oak	10 1/2	13 E	37				
2 N. E. Sec. cor. Identified	Stone							
3 S. E. Sec. cor. Identified								
4 S. W. Sec. cor. Identified								
5 N. 1/4 Sec. cor. Identified	No trees							
6 E. 1/4 Sec. cor. Identified								
7 S. 1/4 Sec. cor. Identified								
8 W. 1/4 Sec. cor. Identified								
No. SUBDIVISION CORNERS.								
1 Center 1/4 Sec. cor.								
2 North 1/4-1/4s N. W. qr.								
3 East 1/4-1/4s N. W. qr.								
4 South 1/4-1/4s N. W. qr.								
5 West 1/4-1/4s N. W. qr.								
6 Center 1/4-1/4s N. W. qr.								
7 North 1/4-1/4s N. E. qr.								
8 East 1/4-1/4s N. E. qr.								
9 South 1/4-1/4s N. E. qr.								
10 Center 1/4-1/4s N. E. qr.								
11 East 1/4-1/4s S. E. qr.								
12 South 1/4-1/4s S. E. qr.								
13 West 1/4-1/4s S. E. qr.								
14 Center 1/4-1/4s S. E. qr.								
15 South 1/4-1/4s S. W. qr.								
16 West 1/4-1/4s S. W. qr.								
17 Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.	FLAGMEN.	AXMEN.
John Brozek Frank Borkany	John Brozek Jr	William Gorton

MINUTES.

Put in N.W. corner of Sec 33 by measurements as follows
 I measured from N.W. corner of Section from stone found in center of the survey
 that was put in years ago from old bearings I found the stone by chaining from
 quarter post on N. side of 34 and 47 post between 27 and 28 then I run West 8060 links
 then I went West and chain 40 and 2 links and divided distance E and West -
 then I went North to 47 stake and chained 40 chains South and put in stone
 and made one bearing tree marked at post - B 7 as described above

MIS 33180600001