


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, } ss. J. M. G. Smith Deputy Surveyor, in and for the County and State aforesaid, do
 ADAMS COUNTY. }
 hereby certify that I have surveyed and subdivided Section 28 Township 19 North of Range 5 East of 7
 Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:
 Established the center of the section at the point of intersection of straight quarter lines.
 Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section
 corners, according to the original field-notes of the Government survey.
 Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

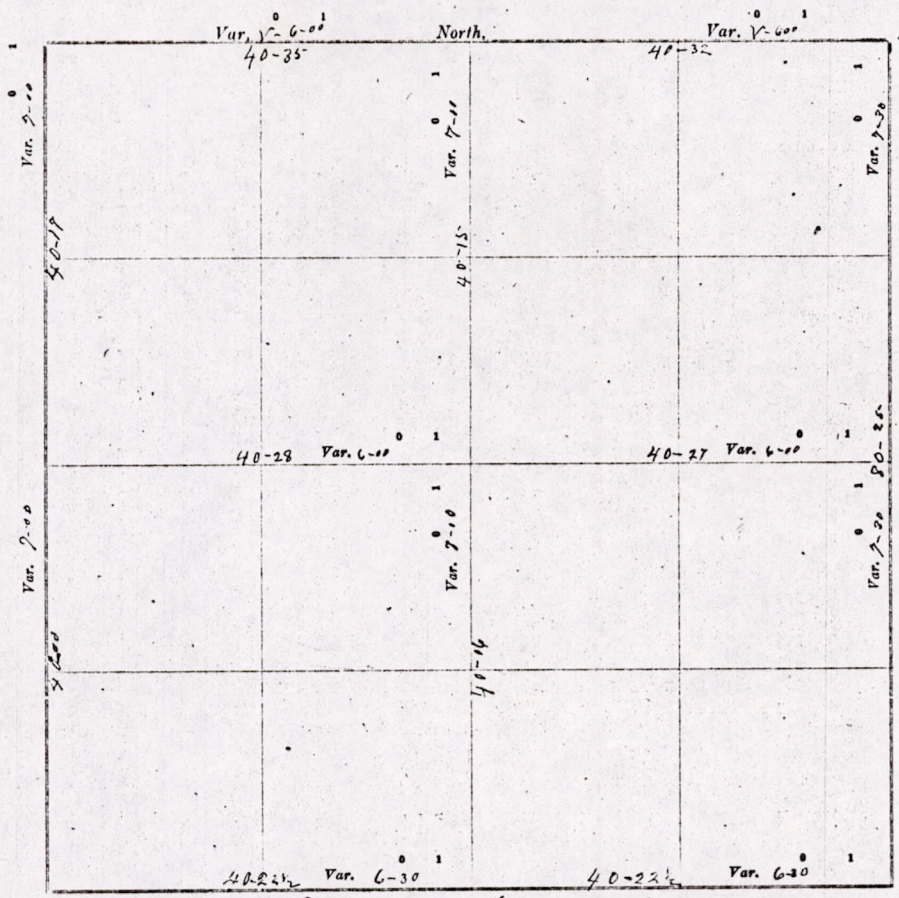

Plat of Section 28, Township 19 North, Range 5 East of 7 Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.
 Surveyed and subdivided July 8th A. D. 1901, in accordance with the State Laws and Instructions of
 the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.
 WITNESS my hand this 8th day of July A. D. 1901.

J. M. G. Smith Deputy Surveyor.

*Of the
 East co
 to south
 North
 40 cha
 identifi
 of sect
 section
 at 7-3
 to 4.0
 the
 side
 (stone)
 at the
 dist.*

MIS 28190500001

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section

Township _____ North, Range _____ East of _____ Principal Meridian.

N. B. - The variation of needle adopted in establishing corners is _____

No.	Government Corners.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified	New		Blk Line	6			S 79 1/2 W	130 1/2
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified	Stone							
8	W. 1/4 Sec. cor. Identified								
NO. SUBDIVISION CORNERS.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.

FLAGMEN.

AXMEN.

MINUTES.

Of the survey of section 28-7-19-R-5-E, Starting at the South East corner of said section thence corner identified, thence west at 6-30-V to south west corner of section. corner identified, Distance 90-45; thence North at 7-00-V to 1/4 Post on west side of section. 1/4 Post identified, Distance 40 chains. thence North same V, to Northwest corner of section. corner identified Distance 40-17; thence East at 6-00-V, to 1/4 Post on north side of section. 1/4 Post identified, thence East at 6-V to North East corner of section Distance 40-32, corner identified, (New Bearing), thence South at 7-30-V, to South East corner Distance 80-25, could find no bearing to 1/4 Post on East side of section but placed it equal Distance from the N.E. & S.E. section corners, thence Starting at the 1/4 Post on north side of section (Stone), and ran North at 7-00-V 40-6 to center of section (Stone) thence North to 1/4 Post on side of section 40-13; thence starting at the West 1/4 Post & Ran East at 6-V 40-28 to center. thence to East 1/4 Post Distance 40-27

M. C. Smith Deputy Co. Surveyor

MIS 28190500001