

CERTIFICATE OF SURVEY.

STATE OF WISCONSIN,
ADAMS COUNTY.

ss. *Hugh C. Hurley*


Surveyor, in and for the County and State aforesaid, do

hereby certify that I have surveyed and subdivided Section 2 Township 20 North of Range 6 East of Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

Established the center of the section at the point of intersection of *straight* quarter lines.

Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.

Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

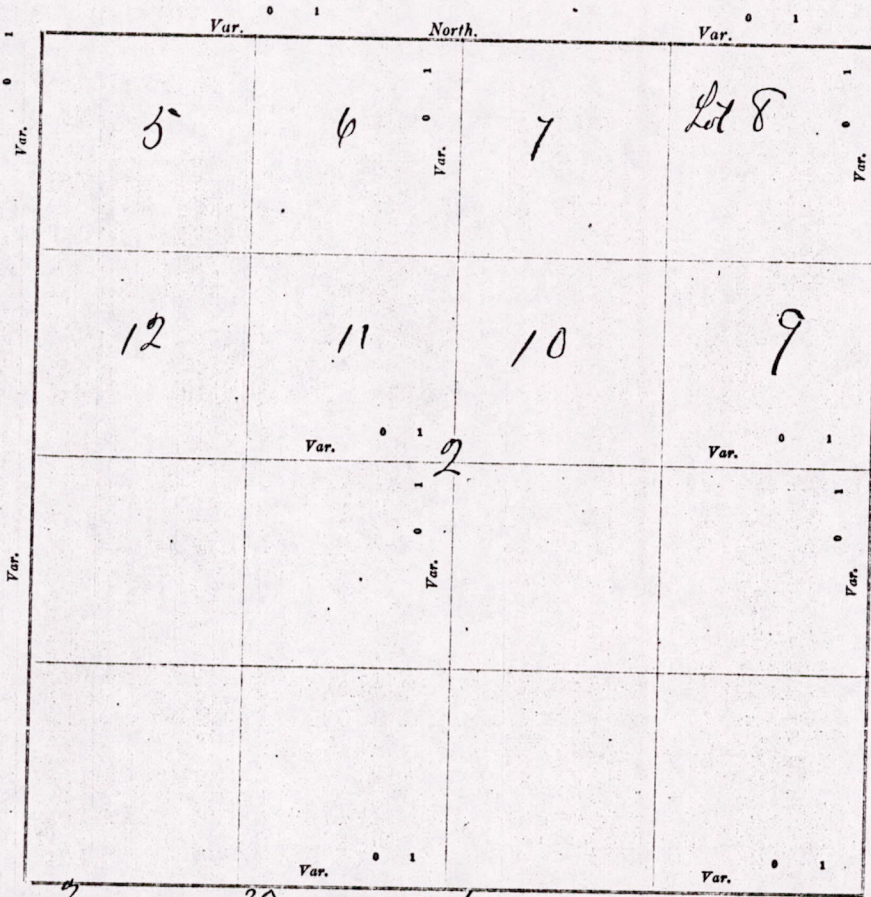

Plat of Section 2, Township 20 North, Range 6 East of 1 Principal Meridian. Scale; 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided October 6 A. D. 1904, in accordance with the State Laws and Instructions of

the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 7 day of October A. D. 1904.

Hugh C. Hurley
Surveyor.

*H. Hurley
W. Buckley*

*I surveyed
commenced at
thence S. 1/4, or
which I measured
which I found
thence I started
N. P. to N. 69 1/2
State thence E*

M1502200600001

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section

Township _____ North, Range _____ East of _____ Principal Meridian.

N. B. - The variation of needle adopted in establishing corners is _____

and State aforesaid, do East of _____

and quarter section Government survey:

Year

Per

No.	Government Corners.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified								
NO. SUBDIVISION CORNERS.									
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.	FLAGMEN.	AXMEN.
N. Shulby W. Buckley	John Poto	

Scale, 80 chains to 6

and Instructions of office.

Surveyor.

MINUTES.

I surveyed lot 8 and 9 town 20 R 6. commenced at NE corner of lot 8 where I found old government bearings thence S. 146.00 chs to a stone put in by Galtroy which I found to be wrong which I moved 3 feet 4 inches E and put it on a line with N & S corners which I found old original bearings thence I started at N & corner of lot 8. and ran at 20 1/4 chs and put in bearings BK. P. 6 N 69 E 75 BK. P. 8. 8 53 E 55 thence South 40.00 chs to 1/4 line and put in stake thence E to line on 1/4 line as corrected by me

MIS02200600001