

CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, }
ADAMS COUNTY, }


I, William H. Smith Surveyor, in and for the County and State aforesaid, do

hereby certify that I have surveyed and subdivided Section 1600 Township 17 North of Range 6 East of Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:

Established the center of the section at the point of intersection of straight quarter lines.

Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.

Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey.

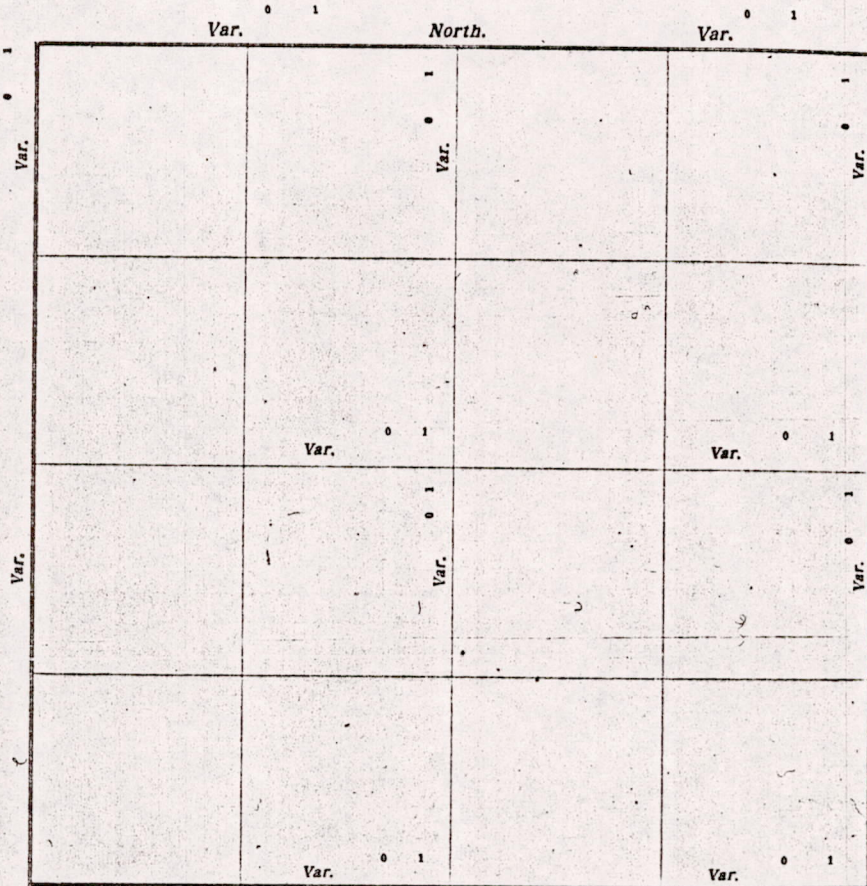

Plat of Section _____, Township _____ North, Range _____ East of _____ Principal Meridian. Scale, 80 chains to 1 inch. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided _____ A. D. 19 _____, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this _____ day of _____ A. D. 19 _____

Surveyor.

Bearings to 17-18-19-20

Bearing: South East corner of dam wing south end 1.19 1/2 links

Corner: 1" pipe 4' long surrounded by stone

A mound Bearing: Post surrounded by stone N. 89 E 100 links

Bearings to 7-18-17-18

Bearing: N.E. Cor. of Dam wing North End 64 links

Corner: Well point in center of ditch

Bearing: S.E. Cor. of Dam Wing South End 62 1/2 links

Bearings to 5-6-7-8

A mound Bearing: Stake surrounded by stone N 3° E 65' Links

Corner 1" pipe 3' long surrounded by stone

Bearing: North East Corner of Dam Wing North End 14 1/2 Links

M. L. S. 12200600001

DESCRIPTION of Section, Quarter Section and Quarter-quarter Section Corners of Section

Township _____ North, Range _____ East of _____ Principal Meridian.

165

N. B.—The variation of needle adopted in establishing corners is _____

Government Corners		Bearing Trees	In. dia.	Courses they bear	Links Distant	Bearing Trees	In. dia.	Courses they bear	Links Distant
No.									
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. $\frac{1}{4}$ Sec. cor. Identified								
6	E. $\frac{1}{4}$ Sec. cor. Identified								
7	S. $\frac{1}{4}$ Sec. cor. Identified								
8	W. $\frac{1}{4}$ Sec. cor. Identified								
No. SUBDIVISION CORNERS.									
1	Center $\frac{1}{4}$ Sec. cor.								
2	North $\frac{1}{4}$ - $\frac{1}{4}$ s N. W. qr.								
3	East $\frac{1}{4}$ - $\frac{1}{4}$ s N. W. qr.								
4	South $\frac{1}{4}$ - $\frac{1}{4}$ s N. W. qr.								
5	West $\frac{1}{4}$ - $\frac{1}{4}$ s N. W. qr.								
6	Center $\frac{1}{4}$ - $\frac{1}{4}$ s N. W. qr.								
7	North $\frac{1}{4}$ - $\frac{1}{4}$ s N. E. qr.								
8	East $\frac{1}{4}$ - $\frac{1}{4}$ s N. E. qr.								
9	South $\frac{1}{4}$ - $\frac{1}{4}$ s N. E. qr.								
10	Center $\frac{1}{4}$ - $\frac{1}{4}$ s N. E. qr.								
11	East $\frac{1}{4}$ - $\frac{1}{4}$ s S. E. qr.								
12	South $\frac{1}{4}$ - $\frac{1}{4}$ s S. E. qr.								
13	West $\frac{1}{4}$ - $\frac{1}{4}$ s S. E. qr.								
14	Center $\frac{1}{4}$ - $\frac{1}{4}$ s S. E. qr.								
15	South $\frac{1}{4}$ - $\frac{1}{4}$ s S. W. qr.								
16	West $\frac{1}{4}$ - $\frac{1}{4}$ s S. W. qr.								
17	Center $\frac{1}{4}$ - $\frac{1}{4}$ s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN	FLAGMEN	AXMEN

MINUTES.

April, 26-1940

Willis Kurth, County Clerk, Located Corner to Sec 7-12-13-18 between Ranges 6 and 7 Stone flush with Surface Lies on center line of both highways, made new bearings.

Black Oak 10" S57°10'E, 95 links

Do - 51°20'W, 169 "

M1512200600001