


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, } ss. W. C. Smith Surveyor, in and for the County and State aforesaid, do
ADAMS COUNTY. } ss. 1 W. C. Smith Township 20 North of Range 6 East of 4th

hereby certify that I have surveyed and subdivided Section 30 Township 20 North of Range 6 East of 4th Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:
Established the center of the section at the point of intersection of straight quarter lines
Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

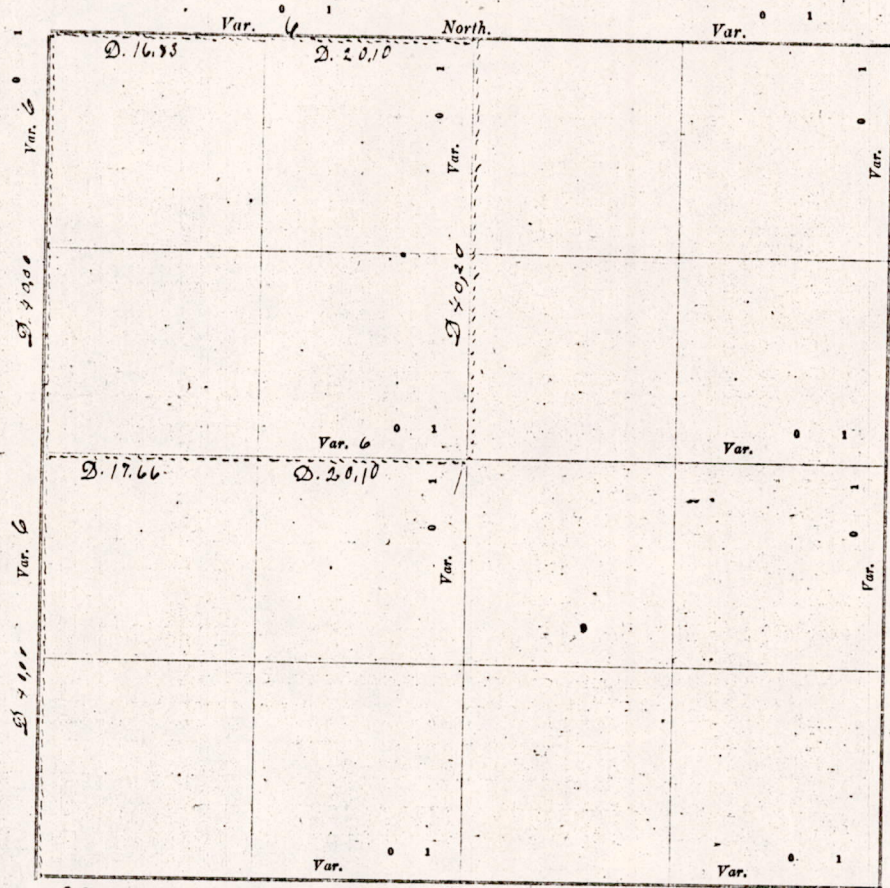

Plat of Section 30, Township 20 North, Range 6 East of 4th Principal Meridian. Scale, 80 chains to 6 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian 6 Degrees East.

Surveyed and subdivided this 10 Day of May A. D. 1907, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 10 day of May A. D. 1907.

W. C. Smith County Surveyor.

The above work was done for Wm Bentley

Ed Smith

*Register
Established
at 0 0 0
20 chains
then near
corner of*

MLS 30 2006 00001

DESCRIPTION of Section, Quarter Section and Quarter quarter Section Corners of Section
 30 Township 21 North, Range 6 East of 4th Principal Meridian.

N. B. - The variation of needle adopted in establishing corners is 6.5.

No.	Government Corners.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.	Bearing Trees.	In. dia.	Courses they bear.	Links Distant.
1	N. W. Sec. cor. Identified								
2	N. E. Sec. cor. Identified								
3	S. E. Sec. cor. Identified								
4	S. W. Sec. cor. Identified								
5	N. 1/4 Sec. cor. Identified								
6	E. 1/4 Sec. cor. Identified								
7	S. 1/4 Sec. cor. Identified								
8	W. 1/4 Sec. cor. Identified								
No.	SUBDIVISION CORNERS.								
1	Center 1/4 Sec. cor.								
2	North 1/4-1/4s N. W. qr.								
3	East 1/4-1/4s N. W. qr.								
4	South 1/4-1/4s N. W. qr.								
5	West 1/4-1/4s N. W. qr.								
6	Center 1/4-1/4s N. W. qr.								
7	North 1/4-1/4s N. E. qr.								
8	East 1/4-1/4s N. E. qr.								
9	South 1/4-1/4s N. E. qr.								
10	Center 1/4-1/4s N. E. qr.								
11	East 1/4-1/4s S. E. qr.								
12	South 1/4-1/4s S. E. qr.								
13	West 1/4-1/4s S. E. qr.								
14	Center 1/4-1/4s S. E. qr.								
15	South 1/4-1/4s S. W. qr.								
16	West 1/4-1/4s S. W. qr.								
17	Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN.	FLAGMEN.	AXMEN.
Ed Ludington David Bentley		

MINUTES.

Beginning at the North west corner of section 30, and running thence south at 6-D-V. 80 chains to the Post at the south west corner of section 80. Established quarter Post at 40 chains. Made one new bearing. Then Run East at 6-D-V. 37 chains & 76 links to center of section. Thence North at 6-D-V. 25 chains & 25 links to the quarter Post on the North side of section 30. Then west at 6-D-V. 36 chain & 98 links to the Post at the North west corner of section 80 & at the place of beginning.

W. L. Smith county Surveyor

MUS 30200600001