

20
SECTION

14
TOWN

07
RANGE

ADAMS COUNTY

COUNTY CORNER NO: 76

ROMPORTOL ID: 41407202000

PUBLIC LAND SURVEY MONUMENT RECORD

TYPE OF MONUMENT: HARRISON (BROKEN-TOP)
ADAMS COUNTY COORDINATES, NAD 83 (2007)

N. 114141.537

E. 567810.206


ELEVATION- _____ DATUM _____

FIELD WORK DATE: 04/23/2020

BASIS FOR MONUMENT LOCATION


1980 - PLS 1478 SET HARRISON MONUMENT EQUIDISTANT AND ON LINE BETWEEN ADJACENT SECTION CORNERS. NO EXCAVATION WAS MADE DUE TO CUT AREA IN TOWN ROAD. NO RECORD OF MONUMENTATION SUBSEQUENT TO THE ORIGINAL WAS FOUND, ALTHOUGH SURVEYS WERE MADE USING THIS CORNER IN 1875 BY Z. WISE IN OLD FIELD BOOK 2, PAGE 129 AND IN 1881 BY M. LATHROP IN OLD FIELD BOOK 2, PAGE 152. (OLD FIELD BOOK REFERS TO THOSE IN THE ADAMS COUNTY SURVEYOR'S OFFICE.).

2020 - PLS 2675 FOUND MAG NAIL IN THE ROAD SURFACE, REMOVED AND FOUND HARRISON (BROKEN-TOP) 12"± BELOW THE ROAD SURFACE AND 1 TIE. THE MONUMENT AGREES WITH THE EXISTING TIE. ACCEPTED THE HARRISON (BROKEN-TOP) AS THE CORNER LOCATION. SET 3 NEW TIES AND MEASURED TO THE EXISTING TIE.



LOCATION
(INDICATE CORNER BY "X")

SEAL:





DATA SHOWN HERE ON THIS TIE SHEET IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR

DATE 5/28/2020

TIE SKETCH

NOTE: THE CORNER LANDS 2.4'± WEST OF 5TH AVE. CENTERLINE.

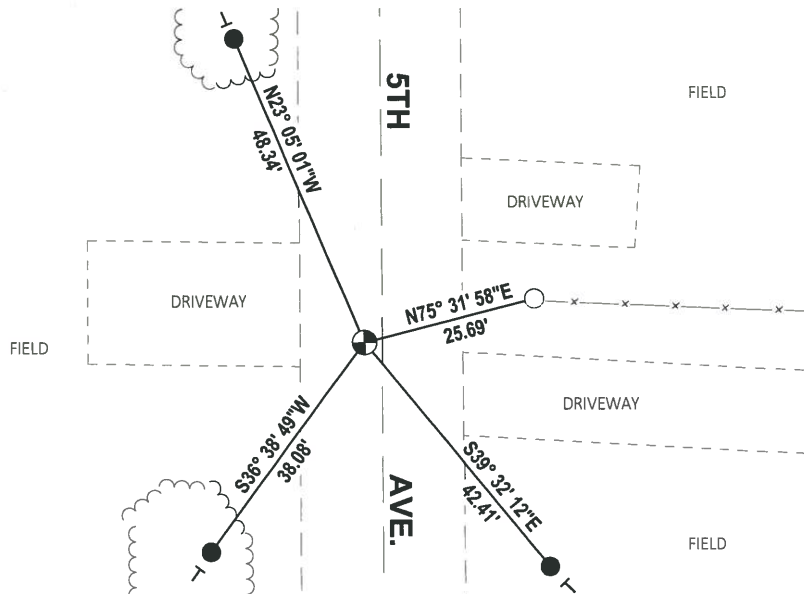

- SET 3/4" x 18" IRON REBAR, 1.50#/FT
- FOUND 3/4" IRON ROD
- ⊕ FOUND HARRISON (BROKEN-TOP) MONUMENT
- ┆ VINYL "T" POST

Government Land Corner Certificate

ADAMS County

TYPE OF MONUMENT: HARRISON

STATE PLANE COORDINATES: N _____

E _____


ELEVATION — M.S.L. DATUM: _____

THETA ANGLE: _____

FIELD BOOK: A-F 2 PAGE 102


DRAWN BY: S. SORENSEN

CORNER NO. 76
SECTION 21
TOWN 14
RANGE 7



LOCATION
(Indicated by 'X')

SEAL:

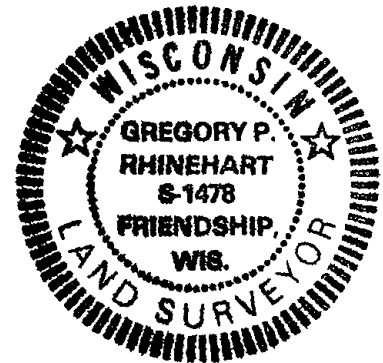

BASIS FOR MONUMENT LOCATION

Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary)

Set Harrison monument equidistant and on line between adjacent section corners. No excavation was made due to cut area in town road. No record of monumentation subsequent to the original was found, although surveys were made using this corner in 1875 by Z. Wise in old field book 2, page 129 and in 1881 by M. Lathrop in old field book 2, page 152. (old field book refers to those in the Adams County Surveyor's office)

DATA SHOWN HERE ON
CERTIFIED CORRECT:


Gregory P. Rhinehart
Registered Land Surveyor

DATE: 10-24-80

TIE SKETCH

Show at least four ties, also fence lines, roads, topo, size and type of witness trees and if off road - best way to arrive at corner.

NOTE: ties are to nail and disc

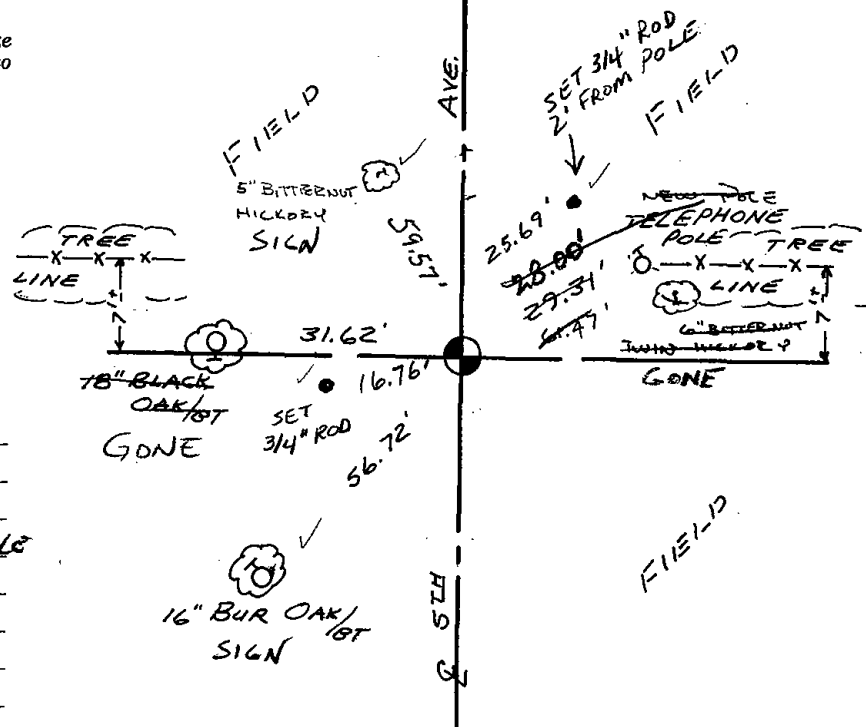


MAINTENANCE RECORD

Date	Init.	Remarks
12-11-81	SK-DW	CORNER O.K
2-19-86	CR-SS	NO TIES AVAILABLE
12-19-90	KZ-JG	2-NEW, 1-GONE
12-1-95	SS	OK
6-11-01	JG	OK
1-24-06	JG	OK
2-16-11	SS	"

ADAMS County

TYPE OF MONUMENT: HARRISON
 STATE PLANE COORDINATES: N _____
 E _____
 ELEVATION — M.S.L. DATUM: _____
 THETA ANGLE: _____
 FIELD BOOK: A-F 2 PAGE 102
 DRAWN BY: S. SORENSEN

CORNER NO. 76
 SECTION 21
 TOWN 14
 RANGE 7

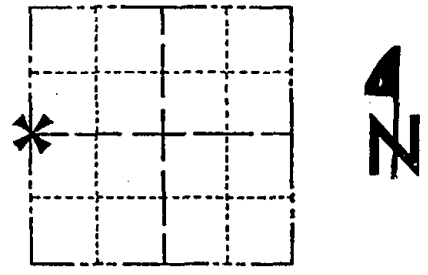

LOCATION
(Indicated by 'X')

SEAL:



DATA SHOWN HERE ON
CERTIFIED CORRECT:

Gregory P. Rhinehart
Registered Land Surveyor

DATE: 10-24-80

BASIS FOR MONUMENT LOCATION


Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary)

Set Harrison monument equidistant and on line between adjacent section corners. No excavation was made due to cut area in town road. No record of monumentation subsequent to the original was found, although surveys were made using this corner in 1875 by Z. Wise in old field book 2, page 129 and in 1881 by M. Lathrop in old field book 2, page 152. (old field book refers to those in the Adams County Surveyor's office)

TIE SKETCH

Show at least four ties, also fence lines, roads, topo, size and type of witness trees' and if off road - best way to arrive at corner.

NOTE: ties are to nail and disc

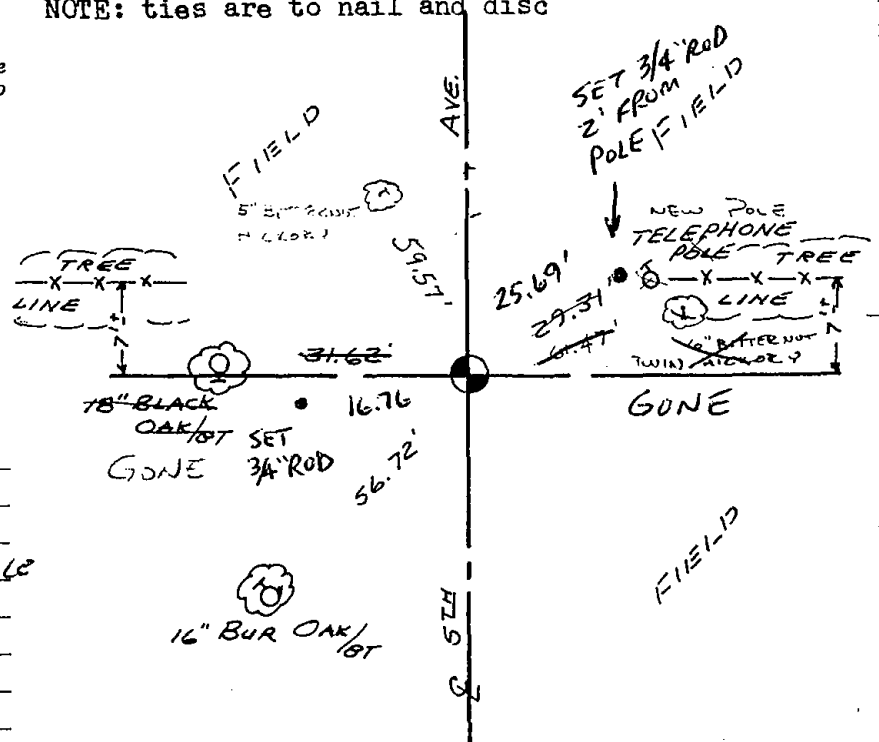

MAINTENANCE RECORD

Date	Init.	Remarks
12-11-81	SK-DW	CORNER O.K
2-19-86	CR-SS	NO TIES AVAILABLE
12-19-90	KZ-JG	2-NEW, 1-GONE
95	SS	"
12-14-00	SH-MC	NEW TIES