

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

ADAMS COUNTY

TYPE OF MONUMENT: SET 1/4" x 30" ROD
 STATE PLANE COORDINATES: N _____
 E _____


ELEVATION — M.S.L. DATUM: _____

THETA ANGLE: _____

FIELD BOOK: 25-14-7 WIS. LAND Co. PAGE 10 FEB 00


DRAWN BY: SMW

CORNER NO. 92
 SECTION 25
 TOWN 14N
 RANGE 7E



LOCATION
(Indicated by 'X')

SEAL:

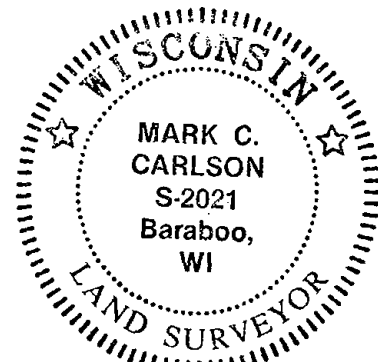

DATA SHOWN HERE ON
CERTIFIED CORRECT:

Mark C. Carlson
Registered Land Surveyor

DATE: 2-15-00

BASIS FOR MONUMENT LOCATION


Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary) (in conformance with Section A-E 502 of the Wisconsin Administrative Code)

Computed N $\frac{1}{4}$ corner using distances on CSM #3049 from existing meander corner to west and 3/4" rod at C $\frac{1}{4}$ corner. Set this meander corner on line between computed N $\frac{1}{4}$ corner and C $\frac{1}{4}$ corner, 659.06' south of N $\frac{1}{4}$ corner.

TIE SKETCH

Show at least four ties, also fence lines, roads, topo, size and type of witness trees' and if off road - best way to arrive at corner.

BEST WAY TO CORNER ACROSS JESKE LANDS OR UP WEST SIDE OF COVE FROM DEAD END OF OAK HILL DRIVE.

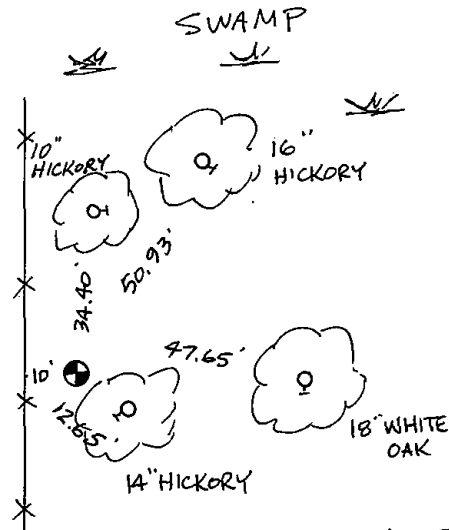

ALL TIES SET
BARN SPIKE

HILL

MAINTENANCE RECORD

Date	Init.	Remarks
10 FEB 00	SMW	SET 1/4" ROD