

02
SECTION

17
TOWN

06
RANGE

ADAMS COUNTY

COUNTY CORNER NO: 30
ROMPORTOL ID: 41706020020

PUBLIC LAND SURVEY MONUMENT RECORD

TYPE OF MONUMENT: HARRISON
ADAMS COUNTY COORDINATES, NAD 83 (2007)

N. 218891.791

E. 549446.454


ELEVATION- DATUM

FIELD WORK DATE: 08/06/2018

BASIS FOR MONUMENT LOCATION

1977 - PLS 1103 DETERMINED SEARCH AREAS WITH AN EDM/T2 TRAVERSE AROUND SECTION 2. ABK DUG WITH A BACKHOE AT THIS LOCATION AND FOUND NOTHING. SET A STANDARD HARRISON MONUMENT PROPORTIONATE AND ON LINE BETWEEN THE SW AND THE SE CORNER OF SECTION 2 AND TIED OUT.


2018 - PLS 2994 FOUND A HARRISON MONUMENT 2" BELOW THE ROAD SURFACE, 1 TIE AND 1 WITNESS. THE MONUMENT AGREES WITH THE EXISTING TIE AND WITNESS. ACCEPTED THE HARRISON MONUMENT AS THE CORNER LOCATION. SET 3 NEW TIES AND MEASURED TO THE TIES AND WITNESS.



LOCATION

(INDICATE CORNER BY "X")

SEAL:




DATA SHOWN HERE ON THIS TIE SHEET IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR

DATE 8-30-18

TIE SKETCH

NOTE: THE CORNER FALLS 4± NORTH OF THE CENTERLINE OF DEERBORN AVE.

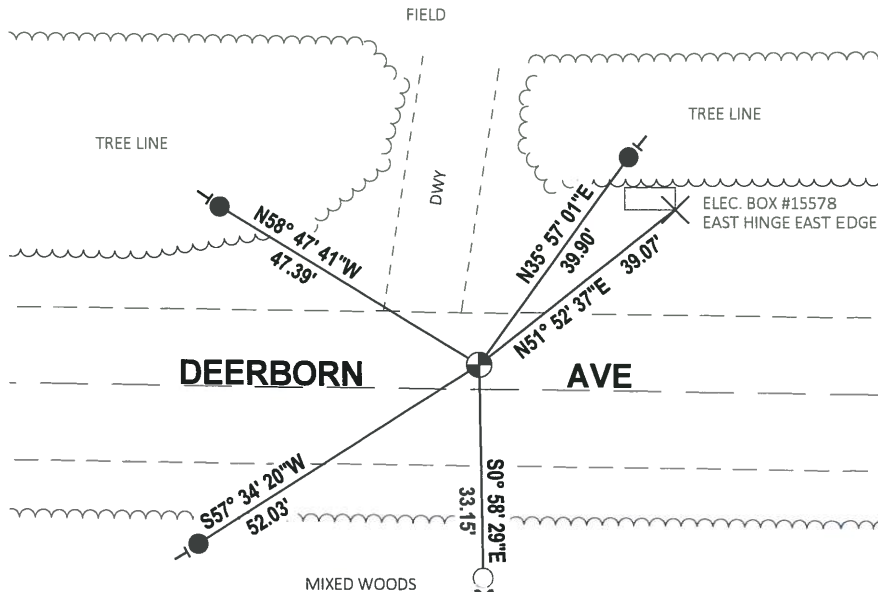


- SET 3/4" x 18" IRON REBAR, 1.50#/FT
- FOUND 3/4" IRON ROD
- FOUND HARRISON MONUMENT
- ~ STEEL FENCE POST
- VINYL "T" POST

Government Land Corner Certificate

ADAMS County
 TYPE OF MONUMENT: HARRISON
 STATE PLANE COORDINATES: N _____
 E _____
 ELEVATION — M.S.L. DATUM: _____
 THETA ANGLE: _____
 FIELD BOOK: 57 PAGE 11
 DRAWN BY: LANCE HARECK

CORNER NO. 30
 SECTION 2
 TOWN 17 N
 RANGE 6 E

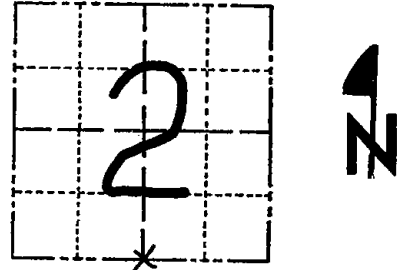

LOCATION
(Indicated by 'X')

SEAL:



DATA SHOWN HERE ON
CERTIFIED CORRECT:

Dale C. Hagen
Registered Land Surveyor
DATE: 9-14-1977

BASIS FOR MONUMENT LOCATION

Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary)

ABK dug with backhoe at this spot and found nothing after determining seach areas with an EDM/T2 traverse around Section 2.


Set standard Harrison Monument proportionate and on line between the SW and the SE cor- of Section 2.

TIE SKETCH

Show at least four ties, also fence lines, roads, topo, size and type of witness trees and if off road - best way to arrive at corner.

NOTE

Ties in trees to nail in disc.

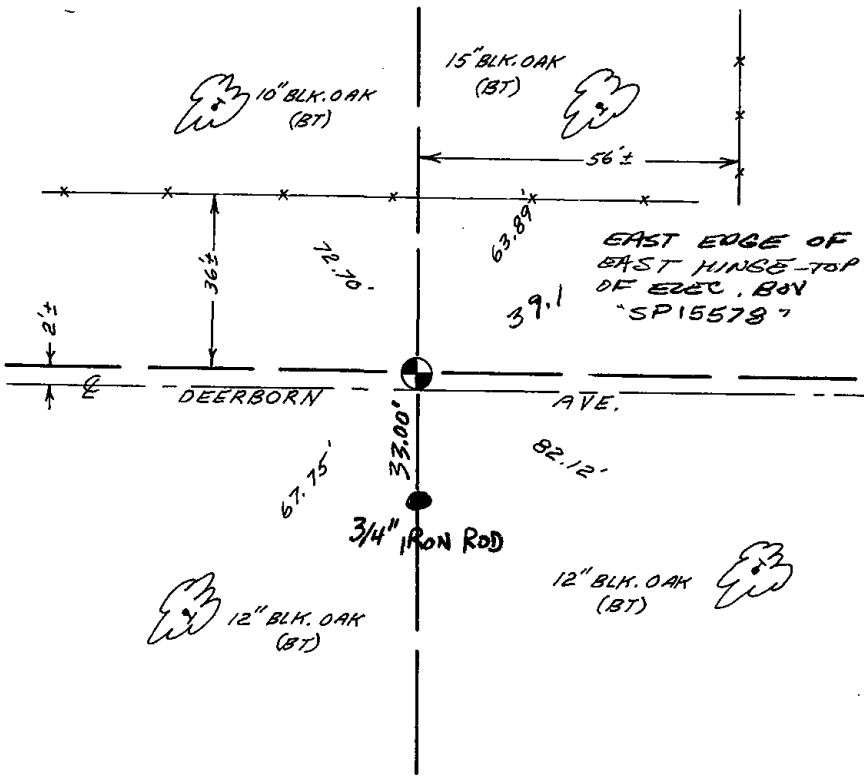

MAINTENANCE RECORD

Date	Init.	Remarks
1/23/80	RN-SS	OK
7-12-85	SS-DK	OK
2-6-90	VZ-CL	OK
7-29-94	JG-BS	OK
1-6-00	JG	OK
1-24-05	JG	1-NEW TIE
2-4-10	SS	1 NEW TIE