# ADAMS COUNTY COUNTY CORNER NO: 48

ROMPORTOL ID: 41707100020

## PUBLIC LAND SURVEY MONUMENT RECORD

**HARRISON** TYPE OF MONUMENT: ADAMS COUNTY COORDINATES, NAD 83 (2007)

N. 213669.086

E. 575741.870


DATUM **ELEVATION-**

04/02/2019 FIELD WORK DATE:


#### BASIS FOR MONUMENT LOCATION

1977 - PLS 1103 SET HARRISON MONUMENT PROPORTIONATE AND ON LINE BETWEEN THE NE CORNER AND THE NW CORNER OF SECTION 15 AFTER AN EXTENSIVE EDM/T2 TRAVERSE OF THE SURROUNDING AREA WAS ANALYZED.

2019 - PLS 2675 FOUND HARRISON 8" BELOW THE SURFACE OF THE ROAD AND 1 WITNESS. THE MONUMENT AGREES WITH THE WITNESS. ACCEPTED THE HARRISON AS THE CORNER LOCATION. SET 3 NEW TIES AND MEASURED TO A FOUND PROPERTY IRON AND THE EXISTING WITNESS.



(INDICATE CORNER BY "X")




DATA SHOWN HERE ON THIS TIE SHEET IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR

#### -TIE SKETCH

NOTE: THE CORNER LANDS ±11.2' SOUTH OF CTH "M" CENTERLINE.



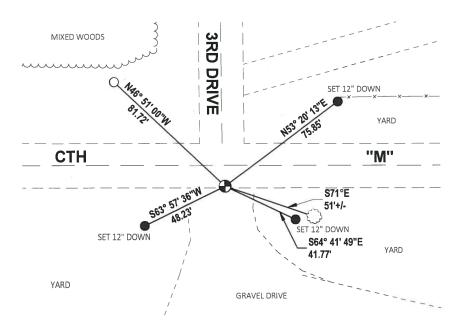

- SET 3/4" x 18" IRON REBAR, 1.50#/FT
- FOUND 3/4" IRON ROD
  - FOUND HARRISON MONUMENT
- WITNESS TREE

### **Government Land Corner Certificate** CORNER NO. County ADAMS **SECTION** TYPE OF MONUMENT: Harrison Standard TOWN STATE PLANE COORDINATES: N. RANGE ELEVATION — M.S.L. DATUM: THETA ANGLE: FIELD BOOK: \_ DRAWN BY: G. Rhinehart BASIS FOR MONUMENT LOCATION Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary) LOCATION (Indicated by 'X') SEAL: Set monument proportionate and on line between the NE corner and the NW corner of Section 15 after an extensive EDM/T2 Traverse of the surrounding area was analyzed. No good place to dig. (AK) **HAGEN** S-1103 Wisconsin Rapids William SURVER DATA SHOWN HERE ON CERTIFIED CORRECT: Registered Land Surveyor DATE: GONE GONE TIE SKETCH Pawer BLACK Show at least four ties, also fence lines, roads, topo, size and type of witness trees' and if off road - best way to W/PINE arrive at corner. NO BT/INYARD 11'± 8" BLKOAK 8" MAINTENANCE RECORD Date Remarks Init. 18"BLACK DAK 3-25-82 GR-55 O.K. OK 1-23-87 JL-55 OK 12-12-91 KZ-SG 1-22-92 JG-SS OK

01-26-12 REVISED 1977

2-20-02

9-19-07

56

J6

1- GONE

3-GONE

OK

3-NEW

mon. ok