# OS ADAMS COUNTY

COUNTY CORNER NO: 127

ROMPORTOL ID: 41905330000


## PUBLIC LAND SURVEY MONUMENT RECORD

TYPE OF MONUMENT: **HARRISON** ADAMS COUNTY COORDINATES, NAD 83 (2007) N. **255799.674** E. 509690.159 DATUM ---**ELEVATION-**FIELD WORK DATE: 01/15/2018


#### BASIS FOR MONUMENT LOCATION

1977 - PLS 878 EXCAVATED WITH A BACKHOE AND FOUND A 5" X 8" X 13" WHITE SANDSTONE. NO RESURVEY RECORDS. LOCATION VERIFIED BY EDM TRAVERSE. LOWERED THE STONE AND SET A HARRISON MONUMENT ON TOP AND TIED OUT CORNER.

2018 - PLS 2994 FOUND A HARRISON MONUMENT 2" BELOW THE ROAD SURFACE. FOUND NO EVIDENCE OF ANY OF THE TIES OR WITNESSES. ACCEPTED THE HARRISON MONUMENT AS THE BEST EVIDENCE OF THE CORNER LOCATION. SET 4 NEW TIES AND MEASURED TO THE



**LOCATION** (INDICATE CORNER BY "X")



DATA SHOWN HERE ON THIS TIE SHEET IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.


PROFESSIONAL LAND SURVEYOR

3-1-18

#### - TIE SKETCH

NOTE: THE CORNER FALLS 1'± NORTH OF THE CENTERLINE OF CHICAGO AVE AND 2'± WEST OF THE CENTERLINE OF 17TH AVE.



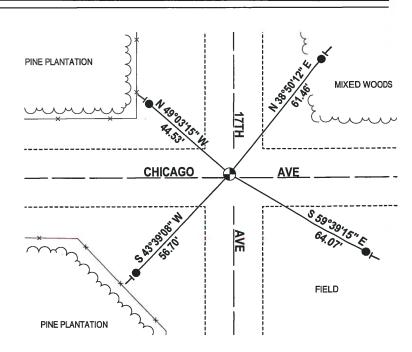

3/4" x 18" IRON REBAR SET, 1.50#/FT HARRISON FOUND → VINYL "T" POST

### Government Land Corner Certificate CORNER NO. \_\_\_\_ ADAMS County SECTION TYPE OF MONUMENT: HARRISON 18 N **TOWN** STATE PLANE COORDINATES: N. 5 E RANGE ELEVATION — M.S.L. DATUM: \_ THETA ANGLE: \_\_\_\_ DRAWN BY: LANCE HABECK BASIS FOR MONUMENT LOCATION Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary) LOCATION (Indicated by 'X') SEAL: Excavated with backhoe. Found 5 x 8 x 13" white sandstone. Lowered stone and set a Harrison monument on top. No resurvey records. ANTHONY B. Location verified by EDM traverse. **KIEDROWSKI** S-878 Wisconsin Rapids RK-SS 7-28-78 OK DATA SHOWN HERE ON CERTIFIED CORRECT: Registered Land Surveyor DATE: 5/26/77 TIE SKETCH Show at least four ties, also fence lines, roads, topo, size and type of witness trees' and if off road - best way to arrive at corner. R.R. SPIKE IN (nail & disc) BASE OF 48" OAK POWER (NO BLAZE) POLE Q 6<sup>4.9</sup>2

MAINTENANCE RECORD

Date	Init.		Remarks	
7-28-78	PX-55	OK		
Z-28-83	GR-55	OK		
9-2-92	<i>I</i> 6	OK		
2-9-98	JG	OK		
2-5-03	56	OK		
12-18-07	36	OK		

CHICAGO AVE.

48.19

O 1824 I.P.

BY FENCE POST

CANCELLOS AVE.

ELSM Z