12 SECTION

OS RANGE ADAMS COUNTY COUNTY CORNER NO: 52 ROMPORTOL ID: 41805120020


PUBLIC LAND SURVEY MONUMENT RECORD

HARRISON TYPE OF MONUMENT: ADAMS COUNTY COORDINATES, NAD 83 (2007) N. **245262.462** E. 523028.270 **ELEVATION-**_ DATUM 10/17/2018 FIELD WORK DATE:


BASIS FOR MONUMENT LOCATION

1981 - PLS 1167 TRAVERSED THE AREA TO LOCATE SEARCH AREA. DUG WITH A BACKHOE AND DID NOT LOCATE THE CORNER IN THE POSSESSION AREA. ALSO SEARCHED IN MIDWAY ON LINE AREA AND DID NOT LOCATE THE CORNER. SET A HARRISON MONUMENT MIDWAY AND ON A STRAIGHT LINE BETWEEN SECTION CORNERS AND TIED OUT.

2018 - PLS 2675 FOUND A HARRISON MONUMENT FLUSH WITH THE GROUND SURFACE AND 2 WITNESS TREES. THE MONUMENT AGREES WITH THE EXISTING WITNESS TREES. ACCEPTED THE HARRISON MONUMENT AS THE CORNER LOCATION. SET 4 NEW TIES AND MEASURED TO THE TIES AND WITNESS TREES.



(INDICATE CORNER BY "X")



DATA SHOWN HERE ON THIS TIE SHEET IS CORRECT AND COMPLETE TO THE BEST OF MY KNOWLEDGE AND BELIEF.

PROFESSIONAL LAND SURVEYOR

-TIE SKETCH


NOTE 1: THE WITNESS TREE FALLS N46°W, 3'± FROM THE CORNER.

NOTE 2: THE WITNESS TREE FALLS S46°W, 7'± FROM THE CORNER.


NOTE 3: THE CORNER FALLS 53'± EAST OF THE CENTERLINE OF CREE AVE.



- SET 3/4" x 18" IRON REBAR, 1.50#/FT
- FOUND HARRISON MONUMENT
- VINYL "T" POST
- WITNESS TREE

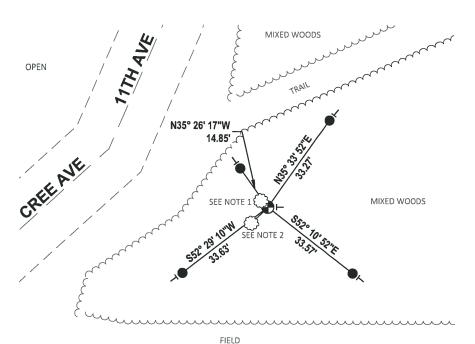

Government Land Corner Certificate 52 CORNER NO. -1DAMS County 2 SECTION Harrison TYPE OF MONUMENT: . TOWN STATE PLANE COORDINATES: 5 **RANGE** ELEVATION — M.S.L. DATUM: _ THETA ANGLE: _ FIELD BOOK: . PAGE . NUBER DRAWN BY: __ BASIS FOR MONUMENT LOCATION Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary) LOCATION (Indicated by 'X') SEAL: Traversed area to locate search area. Dug with backhoe, did not locate corner in possession area, also searched in midway on line area, again could not locate. Set corner midway on straight line between Section Corners. WAYNE BASLER 1167 WIS. RAPIDS DATA SHOWN HERE ON CERTIFIED CORRECT: Registered Land Surveyor DATE: Oct. TIE SKETCH Show at least four ties, also fence lines, roads, topo, size and type of witness trees' and if off road - best way to arrive at corner.

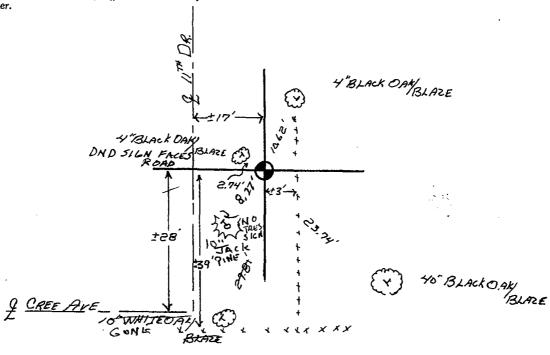

MAINTENANCE RECORD

DATE	BY WHOM	REMARKS
3-1-83	GR- SS	O.K.
9-2-92	J6	I-TIE GONE, I-NEW TIE, MON. OK
2-5-98	JC JG	OK
5-1-03	JG	OK
12-13-07	<i>36</i>	0K
		,