


ADAMS COUNTY

Survey Monument Record


CORNER NO. 31
 SECTION 12
 TOWN 16
 RANGE 5

TYPE OF MONUMENT: Standard Harrison
 STATE PLANE COORDINATES: N 43°53'27.5"
 HAND HELD GPS E 089°51'27.9"
 ELEVATION — M.S.L. DATUM: _____
 THETA ANGLE: _____
 FIELD BOOK: 37 PAGE 66

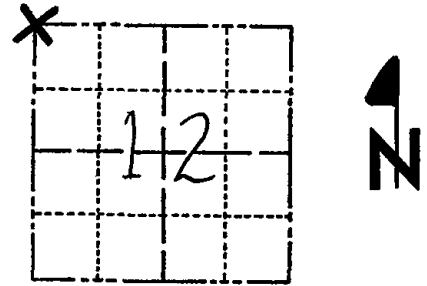

LOCATION
(Indicated by 'X')

SEAL:

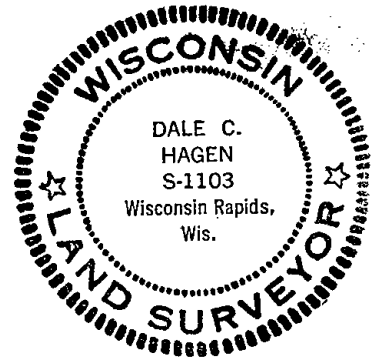

BASIS FOR MONUMENT LOCATION

(Use reverse side if necessary)

Show info such as: History of corner, with reference to Vol. and pg, dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc.

Ran EDM/T2 traverse around Sections 8, 9, 10, 11 and 12 and to adjacent section corners to determine search areas.

Could find no evidence of the original corner, any subsequent remonumentation or any accessory or witness monuments.

Relocated corner by double proportionate measure between four adjacent section corners.

Set 10-11-76.

MON & TIES OK 1-15-81
 Ties all dead but standing, Nothing available for new. 7-22-85 DK-SS
 3-NEW, 1-GONE 10-4-90 JG-SS
 1-NEW TIE, Cor OK, 1-16-06, JG-SS

CERTIFIED CORRECT:

Dale C Hagen
 Registered Land Surveyor
 DATE: 11-30-76

TIE SKETCH

(Show at least four ties)

NOTE:

Ties in trees to nail in disc.

12-07-10 SS
 ALL TREES IN VICINITY ARE DEAD. CORNER UNDERWATER, POST VISIBLE BLAZED 14" BLACK OAK IN 15°E ± 386'

