


Government Land Corner Certificate

ADAMS County
 TYPE OF MONUMENT: HARRISON
 STATE PLANE COORDINATES: N _____
 E _____
 ELEVATION — M.S.L. DATUM: _____
 THETA ANGLE: _____
 FIELD BOOK: 54 PAGE 50
 DRAWN BY: ROGER NUWER

CORNER NO. 113¹¹³
 SECTION 25
 TOWN 20
 RANGE 6



LOCATION
(Indicated by 'X')

BASIS FOR MONUMENT LOCATION

Show info such as: History of corner, with reference to Vol. and pg., dates, surveyor; exact description of monument replaced; if location computed, by taped or EDM traverse; landowner remarks, etc. (Use reverse side if necessary)

Excavation by backhoe yielded no evidence of the original monument nor any evidence of any subsequent monumentation.

This corner was set by the double proportionate measurement method between the SW of 25-20-6, the SE of 30-20-7, $\frac{1}{4}$ of 36-20-6, and the SW of 7-20-7.

Use of this method best "fits" the existing evidence in the area. (fence lines, roads, and possession)

RETIRED COR
 PLACED LITE METAL POST AT CORNER W/SIGN
 LEFT CORNER IN PLACE 10" DEEP
 9/26/02 - JG

SEAL:




DATA SHOWN HERE ON
 CERTIFIED CORRECT:

Gregory P Rhinehart
 Registered Land Surveyor

DATE: 4-19-79

TIE SKETCH

Show at least four ties, also fence lines, roads, topo, size and type of witness trees and if off road - best way to arrive at corner.

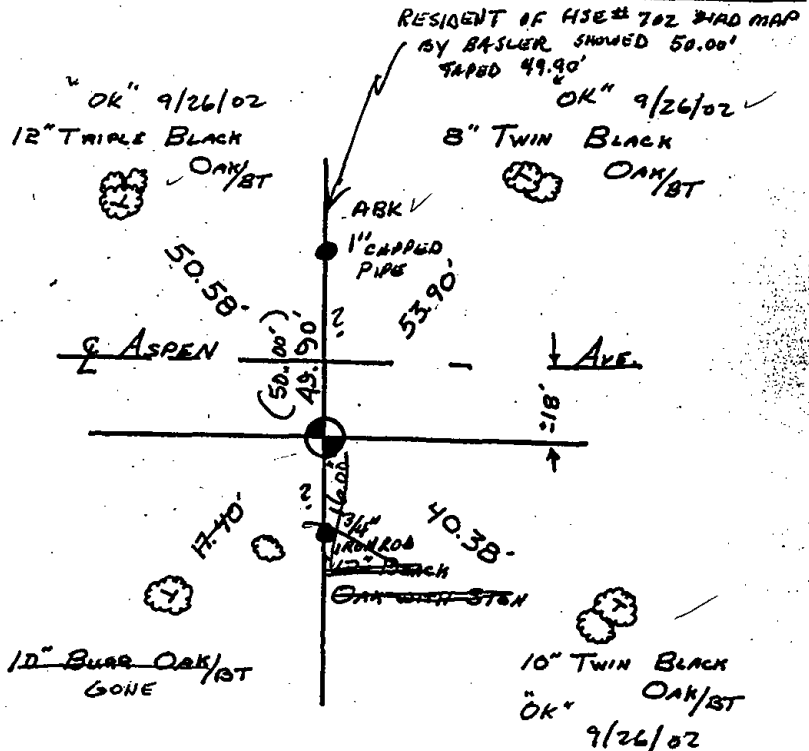

MAINTENANCE RECORD

Date	Init.	Remarks
4-27-84	PK-SS	All OK
2-27-89	SS	OK
3-01-94	GR-SS	OK
2-17-99	JG	TIES OK, CHECK FOR SURVEYS
2-18-04	JG	OK
3-04-09	SS	OK