


CERTIFICATE OF SURVEY.

STATE OF WISCONSIN, } ss. Raymond Phillips Surveyor, in and for the County and State aforesaid, do
ADAMS COUNTY.

hereby certify that I have surveyed and subdivided Section 13 Township 16 North of Range 5 East of 7 P. M.

Principal Meridian, as represented by the courses and distances on the following plat, and annexed field-notes of survey:
Established the center of the section at the point of intersection of straight quarter lines.
Established all quarter-quarter corners upon the section boundary at proportional distances between known section and quarter section corners, according to the original field-notes of the Government survey.
Established all lost corners at proportionate distances between known corners, according to original field-notes of the Government survey:

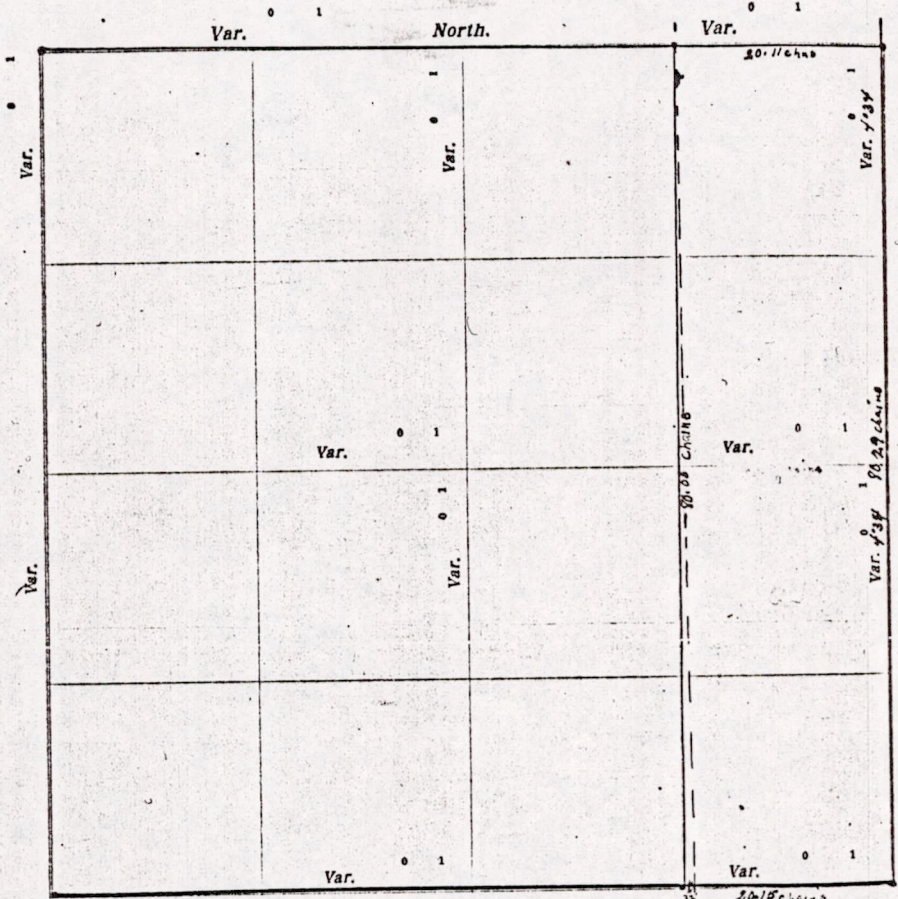

Plat of Section 13, Township 16 North, Range 5 East of 7 Principal Meridian. Scale, 80 chains to 4 inches. The figures in red ink are the lengths of the lines as stated in the field-notes of the Government survey.

Declination of the Magnetic Meridian from the True Meridian _____ East.

Surveyed and subdivided Jan 11, 12, 13, 22, 23, 24, 25, 26, 27, 28, A. D. 1910, in accordance with the State Laws and Instructions of the Commissioner of the General Land Office, and recorded on pages _____ of Register in the County Surveyor's office.

WITNESS my hand this 30 day of January, A. D. 1910.
Raymond Phillips Surveyor.

By the order of the Town Board of the Town of Quincy, the above survey was made.
Gust Holmquist; Chairman
John Avery } Supervisors
Jake May }

M1513160500001

139

DESCRIPTION of Section, Quarter Section and Quarter-quarter Section Corners of Section
 _____ Township _____ North, Range _____ East of _____ Principal Meridian.

N. B.—The variation of needle adopted in establishing corners is _____

Government Corners	Bearing Trees	In. dia.	Courses they bear	Links Distant	Bearing Trees	In. dia.	Courses they bear	Links Distant
No. 1 N. W. Sec. cor. Identified								
2 N. E. Sec. cor. Identified	Black Oak	6	S 63 E	4 1/2 links	Black Oak	7	S 55 3/4 W	1 1/2 links
3 S. E. Sec. cor. Identified	Jack Pine	8	N 77 W	4 1/2 links	Jack Pine	6	S 10 W 7/8 links	5 7/8 links
4 S. W. Sec. cor. Identified								
5 N. 1/4 Sec. cor. Identified								
6 E. 1/4 Sec. cor. Identified								
7 S. 1/4 Sec. cor. Identified								
8 W. 1/4 Sec. cor. Identified								
Subdivision Corners.								
1 Center 1/4 Sec. cor.								
2 North 1/4-1/4s N. W. qr.								
3 East 1/4-1/4s N. W. qr.								
4 South 1/4-1/4s N. W. qr.								
5 West 1/4-1/4s N. W. qr.								
6 Center 1/4-1/4s N. W. qr.								
7 North 1/4-1/4s N. E. qr.								
8 East 1/4-1/4s N. E. qr.								
9 South 1/4-1/4s N. E. qr.								
10 Center 1/4-1/4s N. E. qr.								
11 East 1/4-1/4s S. E. qr.								
12 South 1/4-1/4s S. E. qr.								
13 West 1/4-1/4s S. E. qr.								
14 Center 1/4-1/4s S. E. qr.								
15 South 1/4-1/4s S. W. qr.								
16 West 1/4-1/4s S. W. qr.								
17 Center 1/4-1/4s S. W. qr.								

NAMES OF SWORN ASSISTANTS.

CHAINMEN	FLAGMEN	AXMEN
Gust Holmquist	Jake May	
John Avery	Raymond Russell	
Louis Russell		
Anton Sjora		
Edward Vondrak Jr.		

MINUTES.

Commence at the S.E. corner of Section 13 and chained west to the one eighth 1/8 cor. set stake at this point found that W.P.A. Project had cleared a strip of timber from the 1/8 corner East four rods in width, since all the work had been done and now ready for the grade. The Town Board ask and order that the new road be placed upon this clearing. Therefor the center line of the new grade is now placed thirty two feet East of the 1/8 corner curving along the 1/8 line on the East side of said line to a point 2000.0 (Two thousand feet) North of the 1/8 corner between 12 and 13. The new road continues on the 1/8 line to the Town line between Quincy and Adams. Two crews were used on this survey Willis Kurth, County Clerk and his men commenced at the S.E. corner of Section 13 and North retraced the Range line between Ranges 5 and 6 also re-chained this line on the East side of 13, 12, 1 and to the 1/4 cor of Section 36, Town 17, Range 5, also the South line of Sec. 13 the East West 1/4 line of Section 30 T. 17 R. 6.

M19316050001